


## Display Cases



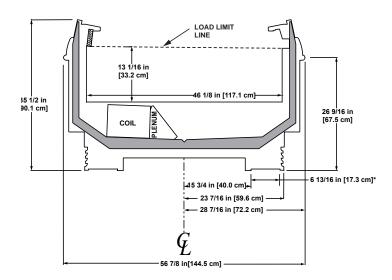

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optimal performance in store environments where temperature and humidity do not exceed 75°F and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.

## **Available Options**

- Available lengths: 6', 8', 10' and 12'.
- · Base frames available in different heights.
- Custom colors, finishes and textures available to meet any merchandising plan.
- Optional dual temp switch allows quick and easy change between medium and low temp applications for increased merchandising flexibility.
- Available with open ends for versatile lineups.
- Fronts are available in solid or glass construction.
- Electric or hot case defrost are available to meet your particular design preferences.
- Arrangements for glycol and CO<sub>2</sub> applications are available.
- Exclusive SmartValve<sup>™</sup> energy-saving technology available.
- Optional electrical outlet can be installed in the kickplate for easy power access.

## **Features and Benefits**

- The extra width and deep bin depth of the OIZ maximizes product packout.
- Adjustable wire display racks can be placed at multiple levels for that "just right" display.
- ECM energy efficient fan motors are provided as a standard offering
- Advanced coil and baffle design provides consistent temperatures throughout the spacious bin for maintaining product integrity.

- Abundant product facings maximize display impact of this wide island case.
- Superior exterior fit and finish for clean, eyecatching lines.
- Lift up fan plenum provides easy access for coil cleaning.
- Easily removable fan assembly.
- Removable castors for easy merchandiser unloading and installation.







Conyers, GA USA 770.285.3264 hillphoenix.com