


**GENERAL NOTES:**

- 4ft cases consist of 2 (24") doors.
- 6ft cases consists of 3 (24") doors.
- 8ft cases Bi-swing consist of 4 (24") doors.
- 12ft cases Bi-swing consist of 6 (24") doors.
- Door frames are heated. Doors are not heated.
- Lighting controls - occupancy sensors are required.
- OPTION 1: OEM Provided: Lighting controls (on/off) are standard unless otherwise specified.
- OPTION 2: END User Provided: Lighting controls should be based on occupancy sensors.



SHIPPING WEIGHT	
Case	Weight
ONRM	---

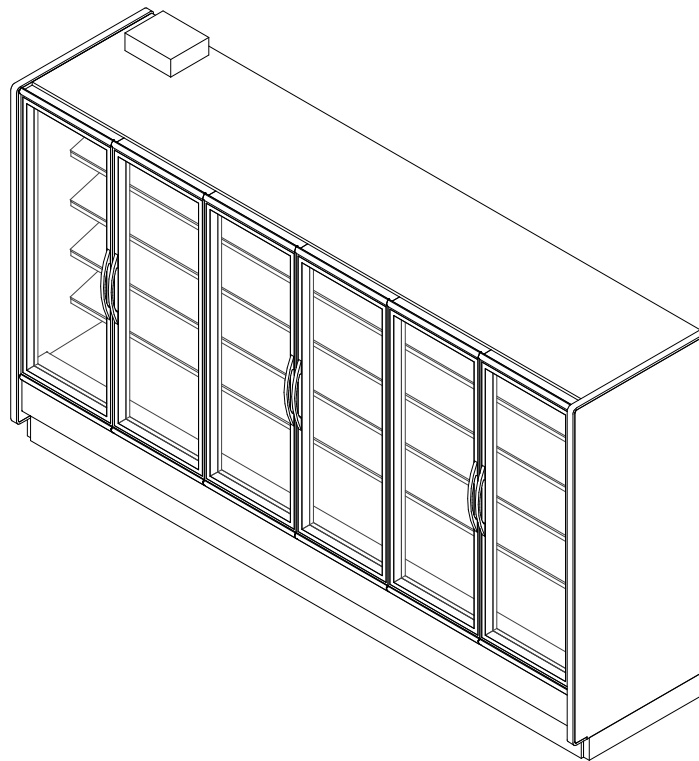

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

**ONRM**

Rev. Date	Rev. #	Rev. Title
12-10-19	5	DATA UPDATE
6-5-19	4	NOTES UPDATE



ELECTRICAL DATA			
Case Length	Fans Per Case	High Efficiency Fans	
		120 Volt	
		Amps	Watts
4'	2	0.43	52
6'	2	0.43	52
8'	3	0.66	79
12'	4	0.88	106

LIGHTING DATA					
Case Length	Lights per row	Clearvoyant v4 LED Lighting (Per Light Row)			
		Standard Power (Cornice or Shelf)		High Power (Cornice Only)	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
4'	1	0.05	5.9	0.12	14.9
6'	2	0.08	9.4	0.20	23.8
8'	2	0.10	11.8	0.25	29.9
12'	3	0.15	17.6	0.37	44.8

ANTI CONDENSATE DATA					
Case Length	Door Size	Anthony			
		I90		Vista-C/I60	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
4'	24"	0.24	28.2	0.44	52.2
6'	24"	0.41	49.2	0.58	69.6
8'	24"	0.47	56.4	0.68	81.6
12'	24"	0.71	84.6	0.93	111.6

GUIDELINES AND CONTROL SETTINGS								
Application	Case Length	Door Size	BTUH/door		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
			Conventional	Parallel				
Meat/Seafood	4', 6', 8', 12'	24"	510	480	6 - 8	28	32	380

DEFROST CONTROLS		
Defrosts Per Day	Timed-Off Defrost	
	Fail-Safe (Min)	Termination Temp (°F)
2	30	42

**NOTES:**

- “---” indicates that the feature is not an option with this case model.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Light wattages above reflect 100% run time. To acquire DOE representation, reduce the light wattage by 42% at 75°F/55%RH.








ONRM

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev. Date	Rev. #	Rev. Title
12-10-19	5	DATA UPDATE
6-5-19	4	NOTES UPDATE

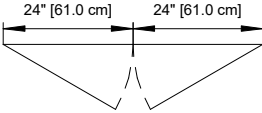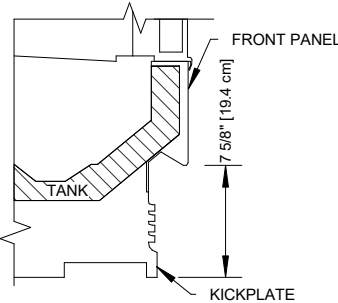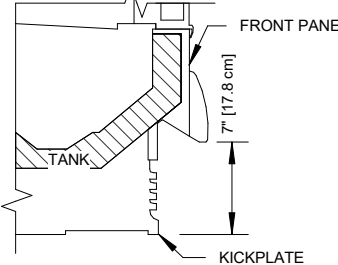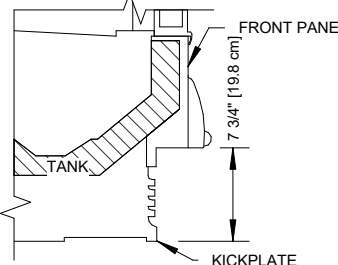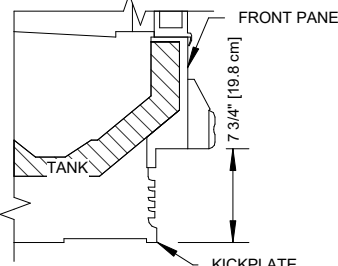


DOOR OPTIONS	FRONT OPTIONS
<p>BI-SWING DOOR 4', 6', 8' &amp; 12' CASES</p> 	<p><b>FLAT FRONT (O SERIES)</b></p> 
	<p><b>STREAMLINE BUMPER</b></p> 
	<p><b>HALF BUMPER</b></p> 
	<p><b>CLASSIC 2 BUMPER</b></p> 



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONRM

Rev. Date	Rev. #	Rev. Title
12-10-19	5	DATA UPDATE
6-5-19	4	NOTES UPDATE

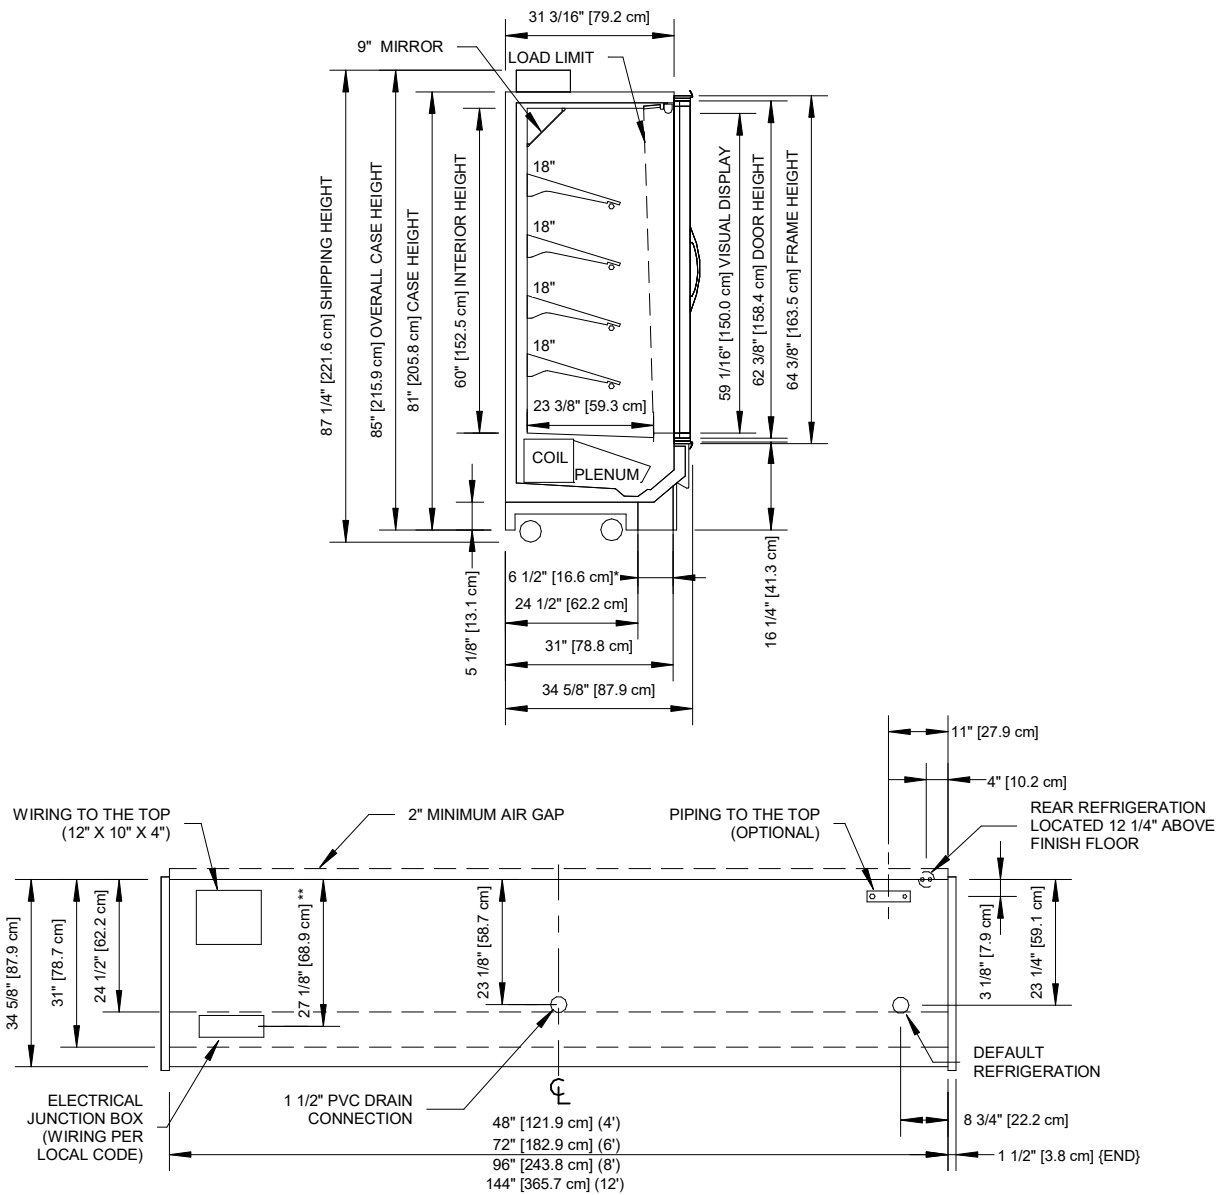

### NOTES:

- \* : STUB-UP AREA.
- \*\* : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS.

- Ends add approximately 1" to the case height, 1/2" to the back & 1" to the front.
- Back panels add approximately 1" to the rear of the case.
- Top canopy LED lights.
- Unvented kickplate adds 1/4".



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### ONRM

Rev. Date	Rev. #	Rev. Title
12-10-19	5	DATA UPDATE
6-5-19	4	NOTES UPDATE

