


BMD-R Deli

Service Multi-Deck

Refrigerated deli merchandiser with flat or curved lift-glass.



Service Multi-Deck

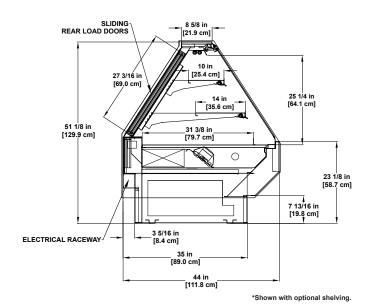

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optional performance in store environments where temperature and humidity do not exceed 75 degrees and 55% R.H. Certified to UP 471 and ANSI/NSF Standard 7.

Base Model Features

- Sled runner base construction.
- Standard 51-1/8"H and 44"D.
- 7-13/16"H toekick height.
- 45 degree front dieboard.
- · Painted metal exterior.
- Stainless steel base trim, front, sides, & rear.
- · Stainless steel exterior trim.
- · Stainless steel outside back and case top.
- · Reflective rear load doors.
- · Single-pane, regular-glare, flat lift front glass.
- · Black painted metal interior and trim.
- · Black painted metal flat bottom merchandising deck.
- · Clearvoyant® LED top light.
- · Rear electrical raceway.
- · Solar digital thermometer.
- · Energy efficient fans.
- Remote DX refrigeration package.

Available Options

- Available lengths: 4', 6', 8', 10' and 12'.
- · Case heights available: 48" and 54".
- Alternate 6-5/16"H toekick height.
- Bullet leg base with adjustable height toekick.
- Painted metal base trim.
- · Cart bumper.
- · Interior and exterior stainless steel finish.
- · Solid surface or stone case top.
- Integrated case top scale stand: Paint, SS, solid surface, or stone
- · Adjustable scale stand: Poly or SS.
- Dedicated ISO per scale stand with optional pull wire.
- Prep to accommodate lighted shelving for future addition.
- (1)row (1) 12" metal shelving with PTM on 48".
- (2) rows (1) 10" and (1) 14" metal shelving with PTM on 51".
- (3)rows (1) 8", (1) 14" and (1) 16" black painted metal shelving with PTM on 54".
- Undershelf lighting.
- · Clear rear load doors.
- Curved regular glare lift front glass or flat or curved nonglare.
- Rear fixed or flip-up work boards: Poly, SS, solid surface.
- · Front electrical raceway.
- ISO outlet/CON outlets or CAT 5.
- Refrigeration options: Thermostat, solenoid, sensor, defrost timer, LLBV, EPR valve, controller, coated coil (consult factory).
- Solid interior mirror polish stainless steel, thermal glass divider or glass ends.
- Remote glycol or CO₂ refrigeration packages.







Dover Food Retail Conyers, GA USA 844.591.5937 hillphoenix.com ©2018 Hillphoenix, Inc.

