

Glass Door Reach-In

Medium and low-temperature merchandisers for beverage, produce, bakery, dairy, deli, meat, seafood, frozen food and ice cream.



CLARITY® reach-in merchandisers

customized with the ideal frame and door options deliver superior performance for every need.

Multiple sizes and configurations help store merchandisers provide unique refrigeration options and enhanced product displays to create a superior shopper experience.



CLARITY®
Reach-In Merchandisers from Hillphoenix





Hillphoenix® is committed to continually raising the bar for quality and innovation. Acculine™ is a brand new production line assembly process developed by Hillphoenix to raise the standard for achieving precise fit and finish in its refrigerated door cases.

Acculine is a new, proven production line assembly process developed by Hillphoenix to raise the standard for achieving precise fit and finish in its refrigerated door cases. This automated line eliminates the variables and production interruptions of traditional hand-assembly by aiding assemblers with the addition of state-of-the-art computer programming and advanced robotics in the company's first automated production line.

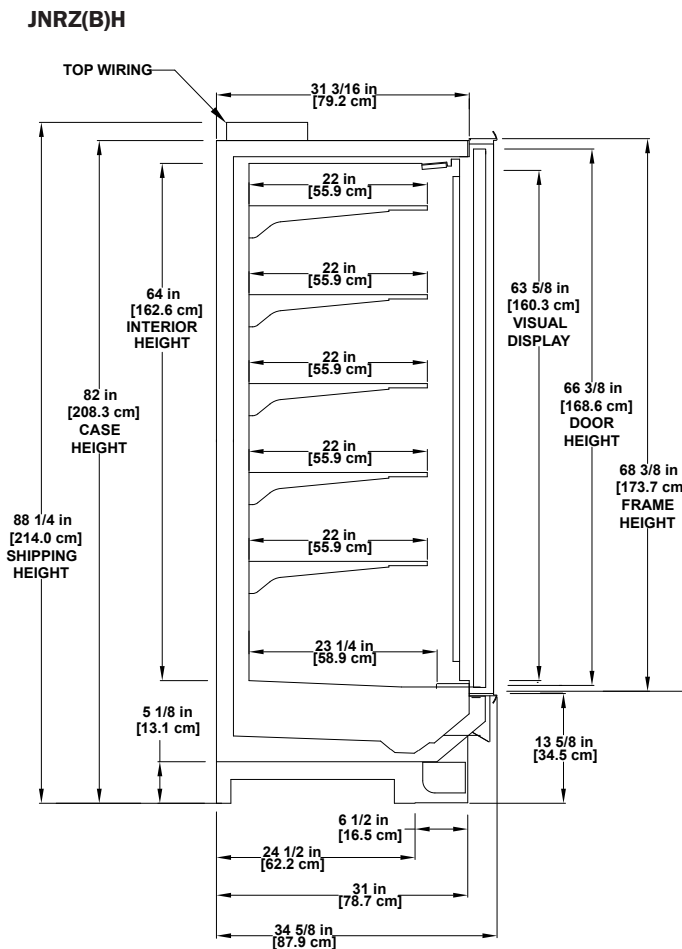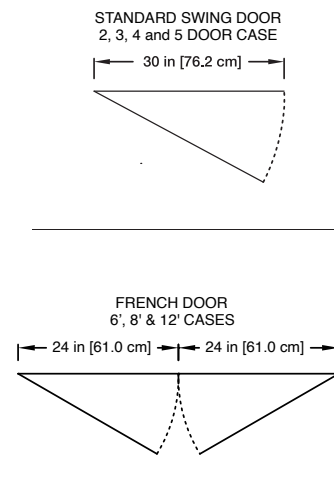

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optimal performance in store environments where temperature and humidity do not exceed 75° F and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.

Base Model Features

- Acculine automated production process achieves precise fit and finishes in J Series reach-in cases.
- Precisely cut interlocking panels and drilled egresses result in a more consistent case that results in a better case-to-case alignment.
- Top wiring with quick-connect electrical harnesses results in faster and accurate connections during installation.
- 64" interior front facings enhance planogram design options with added flexibility and versatility.
- Bottom-mounted refrigeration components facilitate serviceability and allow for full top-shelf merchandising.
- The modular interior component design allows easy access to the coil, fans, and drain for ease of maintenance.
- Proprietary Synerg-E® technology that enables energy efficiency and lower average product temperatures.

- Seamless lineups of low, and medium-temperature cases for consistency in store design.
- Innovative Anthony Optimax® LED lighting for energy efficiency and a stunning merchandise display.
- Single-piece tank design allows for easier defrost condensate draining.
- Removable casters for easy merchandiser unloading, movement, and installation.

Standard Configuration

- Anthony® Black ELM D standard swing door. or Anthony Black Infinity 60 French doors.
- Mechanical TX valves.
- Vented black painted metal kick plate.
- 5 rows of 22" shelves with PVC tag molding.
- Square ends with polymer end trim.
- Flat front.
- Top piping.
- Off-time defrost on medium-temperature.
- Electric defrost on low-temperature.

Available Options

- Medium and low-temperature available lengths: 2, 3, 4 & 5 door with 30" standard swing doors.
- Medium-temperature available lengths: 6', 8' & 12' case with 24" French doors.
- Interior color: appliance white or matte black.
- Exterior color: appliance white, matte & gloss black, textured gray, white knight, bengal silver, antique silver vein, champagne beige, hardwood black, french vanilla, bronze age 2, bleach sand, silver spice, matte steel gray, and silver metallic.
- Available standard swing: Anthony® Infinity 90® or ELM D doors.
- Available French swing: Anthony Infinity 60®, 90®, or ELM D doors.
- 101 Frame for medium-temperature applications.
- 101 LE frame with door rail heat for low-temperature applications.
- Electronic expansion valve
- Controllers for temperature and defrost management.
- Partitions and non-insulated dividers.
- Motion sensors for additional energy savings.
- 12" fascia available.
- Storm gray PVC kick plate.
- 20" shelf option with PVC tag molding for maximum display capacity.
- Rear entry piping available.
- Hot gas defrost on low-temperature.
- Flat front with 1" bumper.
- Anti-condensate controls for low-temperature cases.
- Other Versions: self-contained JNRBHSA and JNRZHSA shown.
- CO₂ refrigeration packages available.



Hillphoenix[®]

2016 Gees Mill Road
Conyers, GA 30013
770.285.3264
www.hillphoenix.com

©2023 Hillphoenix, Inc.
All rights reserved.