Hillphoenix

PF
R-290

Self-contained Merchandisers

Refrigerated mobile merchandiser for bakery, beverage, dairy, and deli.

Photo may depict options not included on standard models.

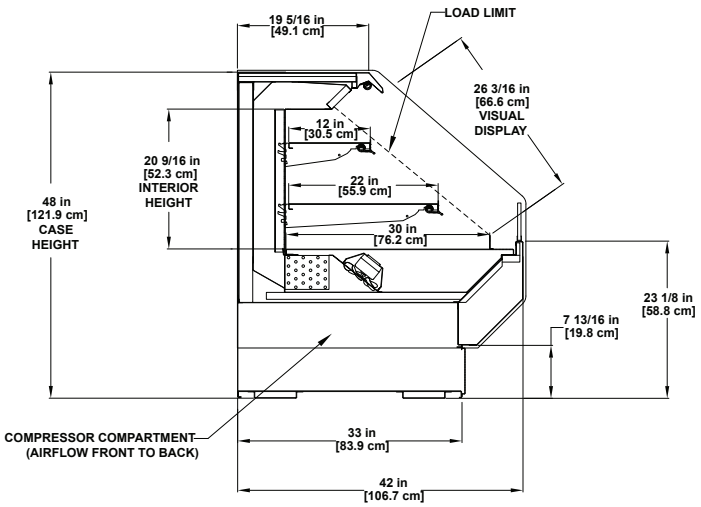

48”H x 42”D

Refrigerated Multi-deck Display

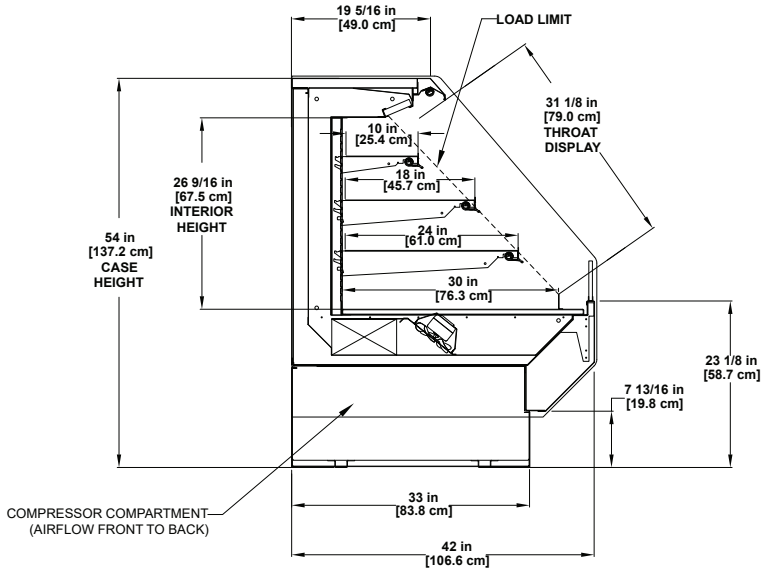

54”H x 42”D

Refrigerated Multi-deck Display

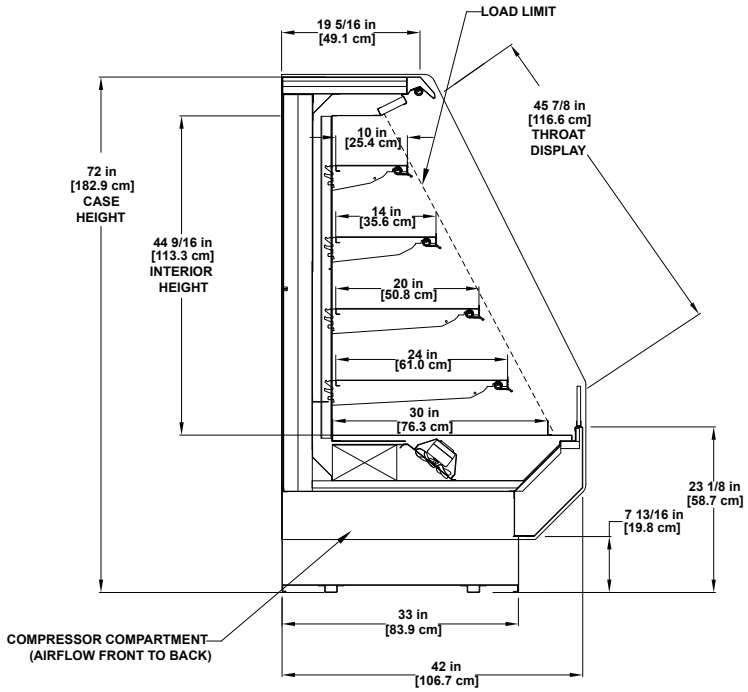

72”H x 42”D

Refrigerated Multi-deck Display

PF-54 R-290 with optional wood cladding on exterior.

Base Model Features

- Sled runner base construction.
- Closed base.
- Angled front profile.
- 18-3/16”H painted metal base, front, and sides.
- Outside back unfinished galvaneal.
- Case top painted to match the exterior.
- Painted metal exterior and trim.
- 5-1/2”H x 1/2” thick polished, straight die board plex.
- Painted metal interior and trim.
- Painted metal shelving: 2 rows shelves in 48”H case, 3 rows shelves in 54”H, and 4 rows shelves in 72”H case.
- Separate on/off light switch located on interior top.
- Painted metal, fixed, flat bottom deck.
- Left and right solid painted metal end panels.
- Energy-efficient fans.
- Solar digital thermometer.
- Electrical location: ballast box.
- Direct wire electrical connection.
- R-290 refrigeration package.
- Magnetic mount condenser air filter
- Front-to-back: straight path with rear lower exhaust.

Height	Depth	Length		
		3’	4’	6’
48”	42”			
54”				
72”				

R-290 Refrigerant

Not available as self-contained

Note: Cases up to 12’ can be achieved by unitizing smaller case lengths.

Available Options

- See case lengths and depths on the chart below.
- Sled runner base construction with leveling pads, bullet legs, and recessed or exposed casters (casters increase case height).
- Straight front profile.
- Exterior finishes: exterior grade laminate, stainless steel or wood cladding.
- Exterior back panel: painted metal or stainless.
- Case top: solid surface, butcher block, laminate, poly, or stone finish.
- Interior finish: mirrored polished stainless steel.
- Clearvoyant® LED top light.
- Separate on/off light switch located on interior top.
- Shelf finish: Stainless steel or glass.
- Shelves: lighted, product stops, additional shelves and price tag molding.
- Night cover: retractable roller shade or polycarbonate panel.
- End panels: framed glass, full view glass pack or thermal divider.
- Cart bumper mounted on the front panel of the case: single or dual row.
- Cart bumper added to end panels.
- UL cord and plug.
- Electrical location: ballast box.
- Rear chimney exhaust front-to-back airflow.
- Slide-in framed mesh condenser air filter.

SECOND NATURE® NATURAL

Second Nature® NATURAL environmentally friendly R-290 hydrocarbon refrigerant has an ozone depletion potential (ODP) of zero (0) and a global warming potential of three (3).

R-290 models are listed for NSF Type II.

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice.

Designedfor optimal performance in store environments where temperature and humidity do not exceed 80° F and 55% R.H. Certified to UL 60335-2-89 and ANSI/NSF Standard 7.

Intertek Intertek 2017 DOE COMPLIANT

DOVER
FOOD RETAIL

Hillphoenix

2016 Gees Mill Road
Conyers, GA 30013
770-285-3264
www.hillphoenix.com

©2026 Hillphoenix, Inc.
All rights reserved.

PF R-290_SERIES_0626