


Service Single-Deck Hot

Hot deli merchandiser with curved or flat lift-glass.



Model SMD-H Service Single-Deck Hot

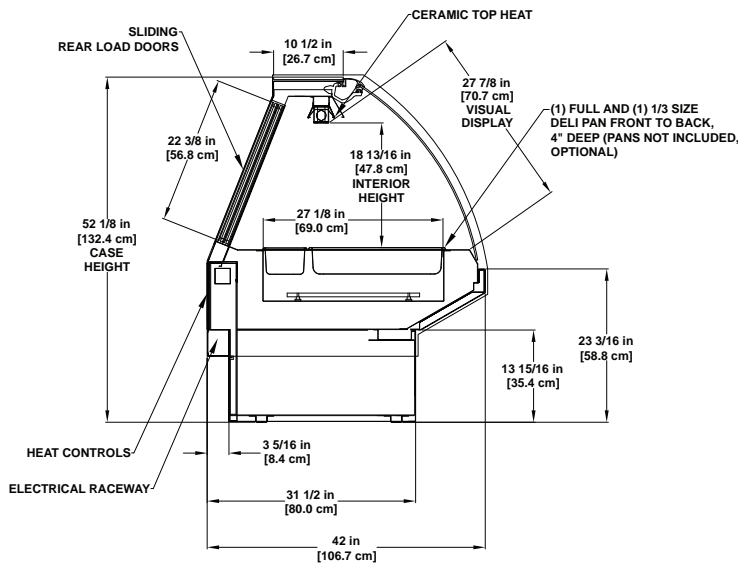

Please consult Hillphoenix Engineering Reference Manual for dimensions, plan views and technical specifications. Specifications subject to change without notice. Designed for optimal performance in store environments where temperature and humidity do not exceed 75° F and 55% R.H. Certified to UL 471 and ANSI/NSF Standard 7.

Base Model Features

- Sled runner base construction.
- Case dimensions: 52-1/8" H & 42" D.
- 13-15/16" H stainless steel toekick, front and sides.
- 60-degree front dieboard.
- Stainless steel outside back and exterior trim.
- Reflective rear load doors with gray frames.
- Single-pane, regular glare curved glass with lift-up glass hardware.
- No glass masking.
- Stainless steel interior and trim.
- Stainless steel dry heat wells including aluminum heaters, divider bars for 4" D full-size pans, and 1/3 size pans (pans not included).
- Overhead ceramic heating elements with 100W incandescent lighting (shatterproof).
- Low wattage, long wave radiant heat system.
- Dry heat, no water connection required.
- Electronically controlled zone heating with Bluetooth connectivity by degree.
- Rear-mounted heat controls - separate controls for well & top heat.
- 2" dial thermometer.
- Rear electrical raceway location.
- 120/208-3-60.

Available Options

- Available lengths: 4', 6', 8', 10' and 12'.
- Alternate case height: 54-1/8".
- Flat front profile.
- Bullet leg base with adjustable height toekick.
- Pedestal base or false pedestal base.
- Exterior finishes: Exterior grade laminate or stainless steel.
- Solid surface or stone case top.
- Integrated case top scale stand or adjustable scale stand.
- Single-pane, regular glare flat glass with lift-up glass hardware.
- Single-pane, regular glare vertical glass with the option of swing or lift-up hardware.
- Glass masking.
- Rear flip-up work boards (fixed or flip-up) in poly, stainless steel, or solid surface.
- Paper cutters.
- ISO outlet/CON outlets (specify vertical or horizontal placement on rear).
- Stainless steel pans (specify size and quantity).
- Stainless steel solid deck or hot ceramic tiles.
- Clear rear load doors.
- Front glass masking.
- Control cover.
- Solid or full-view end panels with mirror-polished, stainless steel interior.
- Thermal divider.
- Cart bumper mounted on the front panel of the case.
- Cart bumper added to end panels.
- Front electrical raceway.



Conyers, GA 30013
770.285.3264
hillphoenix.com

Hillphoenix

©2024 Hillphoenix, Inc.
All rights reserved.

S01_SMD-H_v0524