

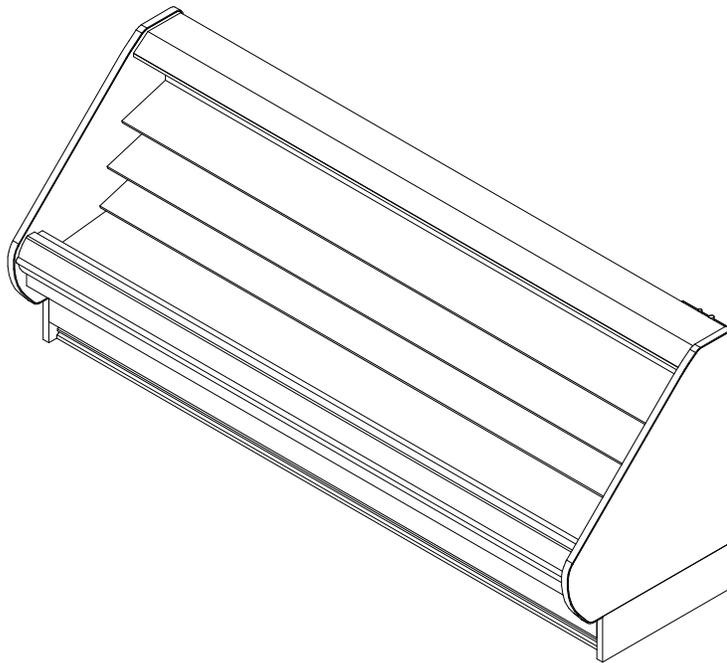
O3.25UMQA-NRG

8' & 12' Multi-Deck Merchandiser with Synergy-E™
Bakery/Dairy/Cut Produce/Deli/Meat/Seafood



GENERAL NOTES:

- "----" indicates that the feature is not an option for this case model and/or the data is not yet available.
- LED lights only.
- Maximum of 3 rows of standard output LED lighted shelves.
- Nose lights are not available.



SHIPPING WEIGHT	
Case	Weight
O3.25UMQA-NRG	----



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

O3.25UMQA-NRG

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



O3.25UMQA-NRG

8' & 12' Multi-Deck Merchandiser with Synergy-E™
Bakery/Dairy/Cut Produce/Deli/Meat/Seafood



ELECTRICAL DATA			
Case Length	Fans Per Case	High Efficiency Fans	
		120 Volts	
		Amps	Watts
8'	2	0.32	22.0
12'	3	0.48	33.0

LIGHTING DATA						
Case Length	Lights per row	Lights Length	Clearvoyant LED Lighting (Per Light Row)			
			Standard Power (Cornice or Shelf)		High Power (Cornice)	
			120 Volts		120 Volts	
			Amps	Watts	Amps	Watts
8'	2	4'	0.10	11.8	0.25	29.9
12'	3	4'	0.15	17.6	0.37	44.8

DEFROST CONTROLS		
Defrosts Per Day	Timed-Off Defrost	
	Fail-Safe (Min)	Termination Temp (°F)
6	3	47

NOTES:

- "---" indicates that the feature is not an option for this case model and/or the data is not yet available.
- Listed discharge air velocity represents the average velocity immediately after defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

O3.25UMQA-NRG

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



A DOVER COMPANY

03.25UMQA-NRG

8' & 12' Multi-Deck Merchandiser with Synergy-E™
Bakery/Dairy/Cut Produce/Deli/Meat/Seafood



SOLOCHILL DATA			@95° Condensing Temperature			
Volts	Phase	Frequency	Wire			
208	1	60	3 Wire + Ground			
Application			Case Length	Evaporator Temp (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
Bakery/Dairy/Cut Produce/Deli			8'	26	31	150
Bakery/Dairy/Cut Produce/Deli			12'	26	31	150
Meat/Seafood			8'	24	30	150
Meat/Seafood			12'	24	30	150

Application	Case Length	R448A					
		Condensing Unit Model	MCA	MOP	Required Capacity	THR (BTUH)	Flow Rate
Bakery/Dairy/Cut Produce/Deli	8'	DA130	11.9	15	7896	9853	2.8
Bakery/Dairy/Cut Produce/Deli	12'	DA220	18.9	20	11844	14458	4.1
Meat/Seafood	8'	DA130	11.9	15	7808	9935	2.8
Meat/Seafood	12'	DA220	18.9	20	11712	14563	4.2

NOTES:

* SoloChill CDU is remote mount only.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

03.25UMQA-NRG

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4



A DOVER COMPANY

































O3.25UMQA-NRG

8' & 12' Multi-Deck Merchandiser with Synergy-E™
Bakery/Dairy/Cut Produce/Deli/Meat/Seafood



NOTES:

- Front and rear sill heights vary with base frame height.
- Extended front sills are required for meat applications to maintain proper product temperature. An extended front has a minimum height of 24" on a 5" baseframe, or 30" on an 11" baseframe.

REAR SILL OPTIONS	FRONT OPTIONS					
	ORIGIN 2 FRONT				FLAT FRONT FLAT TOP	
	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT	STANDARD FRONT
STANDARD REAR SILL 8 1/2" [21.7 cm] 						
12 1/2" REAR SILL 12 1/2" [31.7 cm] 						
16" REAR SILL (REAR DISCHARGE) 16" [40.7 cm] 						
						
	FLAT FRONT ANGLED TOP					
						
						



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

O3.25UMQA-NRG

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4

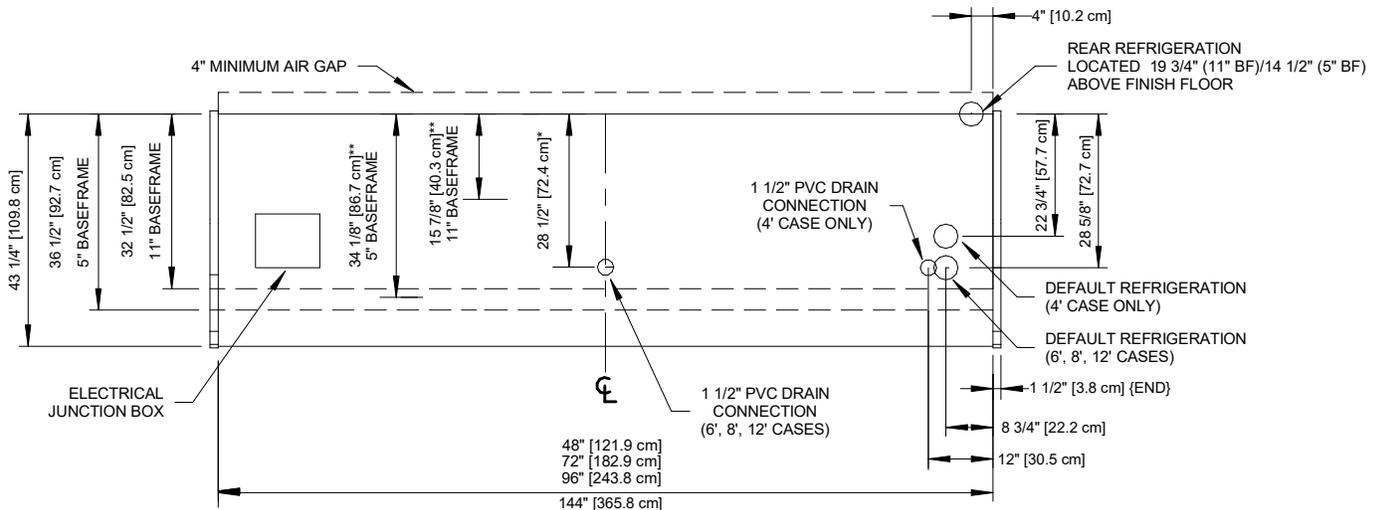
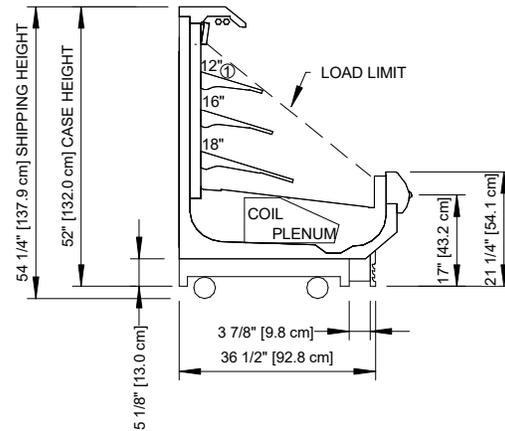
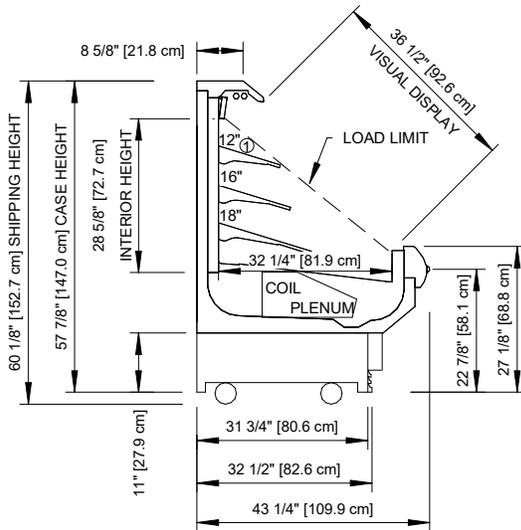


A DOVER COMPANY

O3.25UMQA-NRG

8' & 12' Multi-Deck Merchandiser with Synergy-E™
Bakery/Dairy/Cut Produce/Deli/Meat/Seafood

SOLOCHILL
MICRO-DISTRIBUTED



NOTES:

* : STUB-UP AREA

** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS

Ⓛ : AVAILABLE SHELF SIZES: 10", 12", 14", 16", 18", 20" & 22"

- Ends add approximately 1 inch to case height.
- Product on top shelf should be 3 inches below discharge.



O3.25UMQA-NRG

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev. Date	Rev. #	Rev. Title
9-30-20	2	SOLOCHILL V5
9-18-19	1	SOLOCHILL V4

Hillphoenix
A DOVER COMPANY