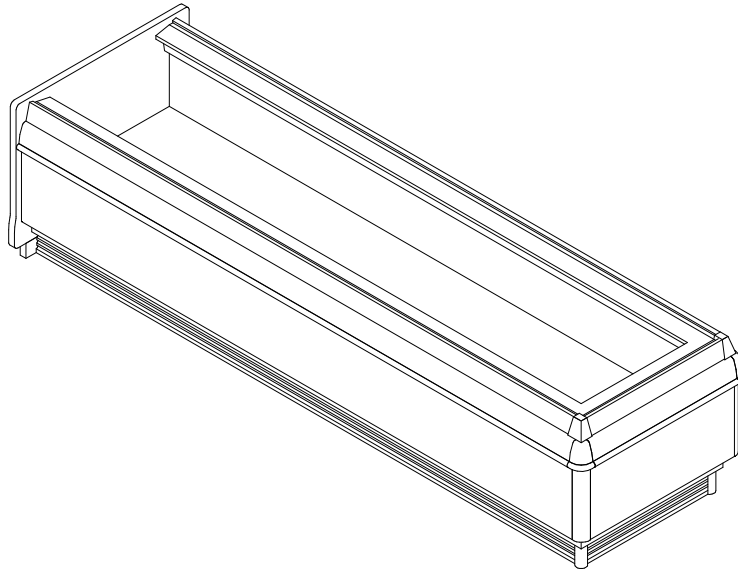


GENERAL NOTES

- "---" indicates that the feature is not an option on this case model and/or the data is not yet available yet.



SHIPPING WEIGHT	
Case	Weight
ONIZ	---



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONIZ

Rev. Date	Rev. #	Rev. Title
5-13-21	5	OPTION PAGE UPDATE
9-14-20	4	OPTIONS UPDATE

ELECTRICAL DATA									
Case Length	Fans Per Case	High Efficiency Fans		Drain Heater		Defrost Heaters (1-Phase)			
		120 Volt		120 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
6'	2	0.30	22.0	0.13	15	11.60	2400	13.30	3196
8'	2	0.30	22.0	0.13	15	11.60	2400	13.30	3196
10'	3	0.45	33.0	0.13	15	14.40	3000	16.70	3994
12'	3	0.45	33.0	0.13	15	17.30	3600	20.00	4795

ANTI CONDENSATE DATA								
Case Length	Solid Front		Glass Front		Glass Front Glass Cap		Glass Wrap End	
	120 Volts		120 Volts		120 Volts		120 Volts	
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
6'	0.50	60.0	0.79	70.0	0.37	44.0	0.22	26.4
8'	0.75	90.0	1.33	160.0	0.42	50.0	0.22	26.4
10'	1.20	111.0	---	---	---	---	0.22	26.4
12'	1.42	120.0	1.69	240.0	0.74	89.0	0.22	26.4

GUIDLINES AND CONTROL DATA											
Application	BTUH/ft				Superheat Set Point @ Bulb (°F)	Evaporator (°F)		Discharge Air (°F)		Discharge Air Velocity (FPM)	
	Solid Front		Glass Front			Solid Front	Glass Front	Solid Front	Glass Front	Solid Front	Glass Front
	Conventional	Parallel	Conventional	Parallel							
Frozen Food	369	352	448	427	3 - 5	-12	-14	-5	-5	225	225
Ice Cream	422	403	481	459	3 - 5	-22	-22	-13	-13	225	225
Medium Temp	213	204	286	273	6 - 8	28	28	34	34	225	225

DEFROST CONTROLS								
Application	Defrosts Per Day	Run Off Time (Min)	Electric Defrost		Timed-Off Defrost		Hot Gas Defrost	
			Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)	Fail Safe (Min)	Termination Temp (°F)
Medium Temp	1	---	35	42	45	42	20	60
Frozen Food/ Ice Cream	1	13 - 15	35	52	---	---	20	60

NOTES

- “---” indicates the feature is not an option for this case model and/or the data is not yet available.
- Load data represents the sum of both coils.
- Listed evaporator temperature represents unlighted shelves.
- BTUH load increases by 132 BTUH/ft when aftermarket merchandising accessories are utilized.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc.
- The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Medium Temp application is run in dual temp mode only.
- Not intended for frozen juice application.













ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONIZ

Rev. Date	Rev. #	Rev. Title
5-13-21	5	OPTION PAGE UPDATE
9-14-20	4	OPTIONS UPDATE

Hillphoenix
A DOVER COMPANY

FRONT OPTIONS			
<u>CLASSIC 2 FRONT</u> 	<u>SOLID FRONT</u> 	<u>THERMOPANE GLASS FRONT</u> 	
END OPTIONS			
<u>SINGLE WRAP END</u> 	<u>DOUBLE WRAP END</u> 	<u>SINGLE FLAT END</u> 	<u>DOUBLE FLAT END</u> 
<u>SINGLE JOINT (BUTT)</u> 	<u>DOUBLE JOINT (BUTT)</u> 	<u>SINGLE WRAP, SINGLE FLAT END</u> 	

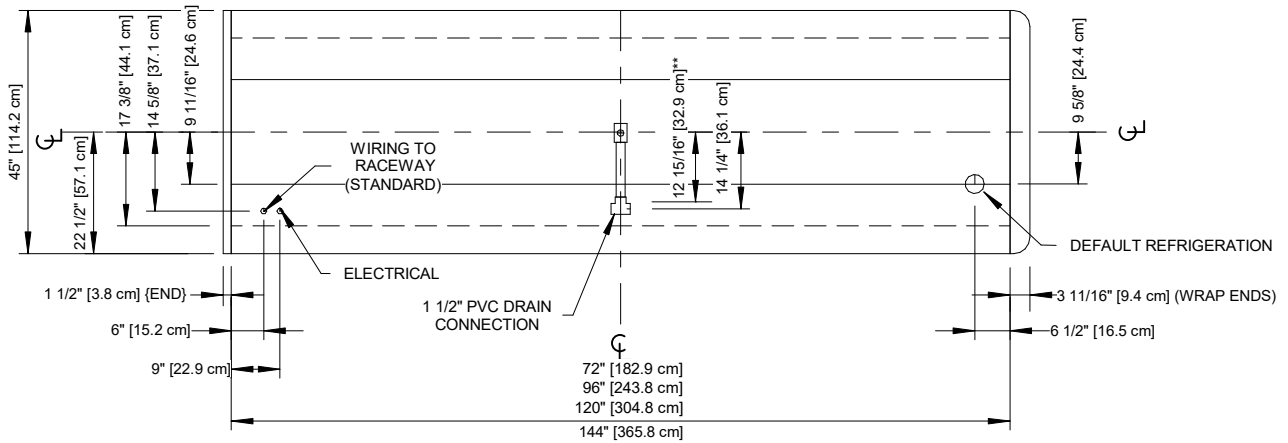
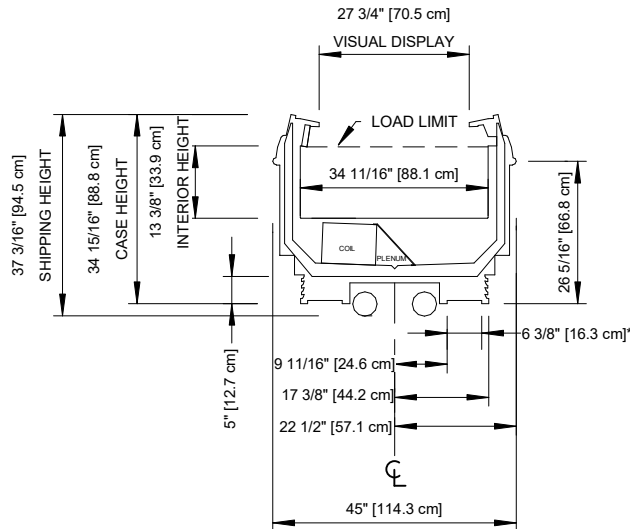


ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONIZ

Rev. Date	Rev. #	Rev. Title
5-13-21	5	OPTION PAGE UPDATE
9-14-20	4	OPTIONS UPDATE





NOTES

- * :STUB-UP AREA
- ** :RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- Front and rear sill heights vary with baseframe height.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONIZ

Rev. Date	Rev. #	Rev. Title
5-13-21	5	OPTION PAGE UPDATE
9-14-20	4	OPTIONS UPDATE

Hillphoenix
A DOVER COMPANY