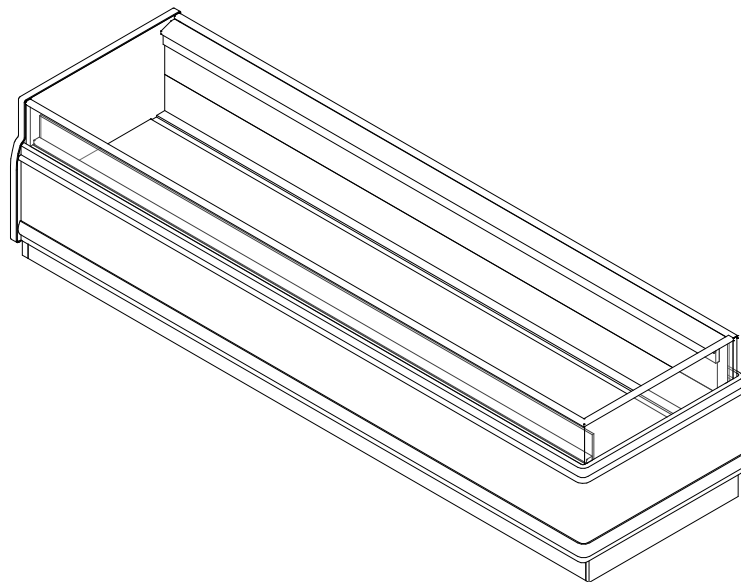


**GENERAL NOTES**

- "----" indicates the feature is not an option for this model and/or the data is not yet available.



SHIPPING WEIGHT	
Case	Weight
ONIZGG	---



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

**ONIZGG**

Rev. Date	Rev. #	Rev. Title
4-9-20	4	DATA UPDATE
4-7-20	3	OPTIONS UPDATE

ELECTRICAL DATA											
Case Length	Fans Per Case	High Efficiency Fans		Anti Condensate Heaters		Drain Heater		Defrost Heaters			
		120 Volt		120 Volts		120 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
5'	2	0.30	22	1.69	203	0.13	15	7.21	1500	8.32	1997
6'	2	0.30	22	2.33	271	0.13	15	8.64	1800	9.98	2396
8'	3	0.45	33	2.54	305	0.13	15	11.55	2400	13.32	3195
12'	4	0.60	44	3.48	417	0.13	15	1500	3600	19.98	4795

GUIDELINES AND CONTROL DATA						
Application	BTUH/ft		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
	Conventional	Parallel				
Frozen Food	553	530	3 - 5	-22	-10	255
Medium Temp	290	284	6 - 8	22	29	255

DEFROST CONTROLS						
Application	Defrosts Per Day	Run Off Time (Min)	Electric Defrost		Hot Gas Defrost	
			Fail-Safe (Min)	Termination Temp (°F)	Fail Safe (Min)	Termination Temp (°F)
Frozen Food	2	13 - 15	35	47	20	60
Medium Temp	2	13 - 15	18	47	10	60

### NOTES

- "----" indicates the feature is not an option for this model and/or the data is not yet available.
- Listed evaporator temperature represents unlighted shelves. For lighted shelves and/or aftermarket merchandising accessories, reduce the listed evaporator temperature by 2°F.
- BTUH load increases by 132 BTUH/ft when aftermarket merchandising accessories are utilized.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Medium Temp application is run in dual temp mode only.



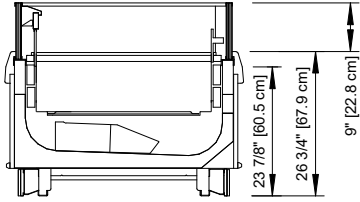


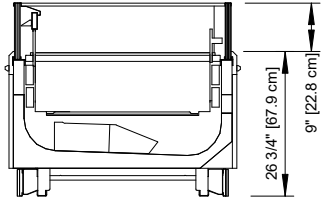


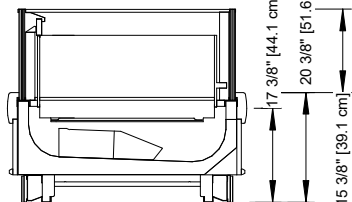


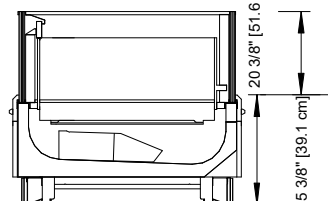

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### ONIZGG

Rev. Date	Rev. #	Rev. Title
4-9-20	4	DATA UPDATE
4-7-20	3	OPTIONS UPDATE



A DOVER COMPANY

GLASS FRONT OPTIONS	END OPTIONS	
<p><u>10" GLASS STREAMLINE FRONT</u></p> 	<p><u>SINGLE WRAP END</u></p> 	<p><u>DOUBLE WRAP END</u></p> 
<p><u>10" GLASS FLAT FRONT</u></p> 	<p><u>SINGLE FLAT END</u></p> 	<p><u>DOUBLE FLAT END</u></p> 
<p><u>17" GLASS STREAMLINE FRONT</u></p> 	<p><u>SINGLE JOINT (BUTT)</u></p> 	<p><u>DOUBLE JOINT (BUTT)</u></p> 
<p><u>17" GLASS FLAT FRONT</u></p> 	<p><u>SINGLE WRAP</u> <u>SINGLE FLAT END</u></p> 	

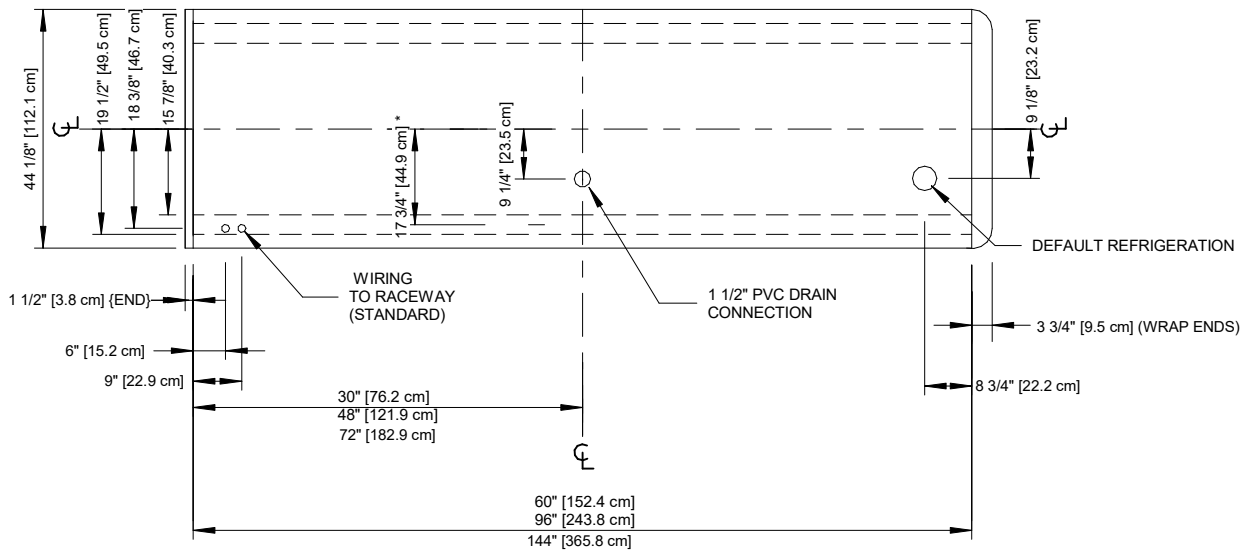
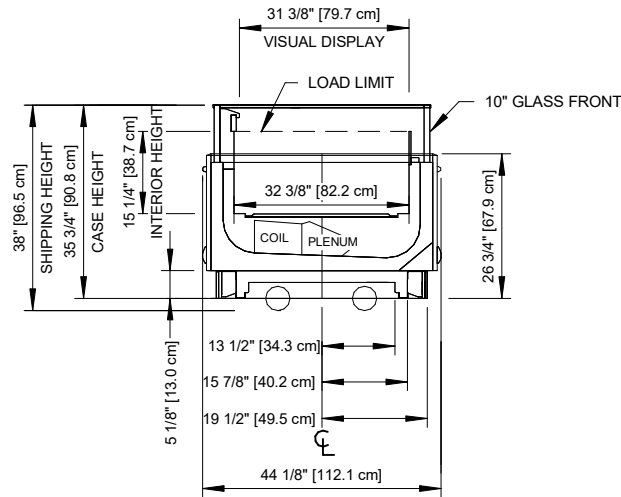


ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

ONIZGG

Rev. Date	Rev. #	Rev. Title
4-9-20	4	DATA UPDATE
4-7-20	3	OPTIONS UPDATE

**Hillphoenix**  
A DOVER COMPANY



## NOTES

- \* :STUB-UP AREA
- \*\* :RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- Front and rear sill heights vary with baseframe height.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

## ONIZGG

Rev. Date	Rev. #	Rev. Title
4-9-20	4	DATA UPDATE
4-7-20	3	OPTIONS UPDATE