

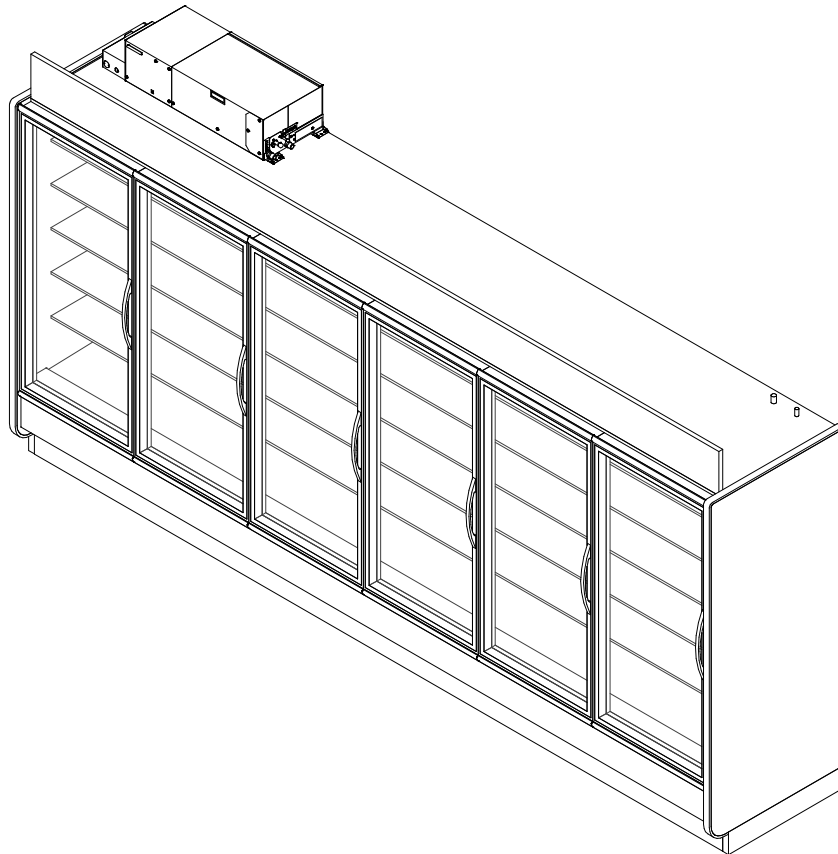
# ONRZQA

1, 2, 3, 4, 5 & 6 Door Narrow Reach-In Glass Door Merchandiser  
Frozen Food/Ice Cream

**SOLOCHILL**  
MICRO-DISTRIBUTED

**GENERAL NOTES:**

- Light controls - occupancy sensors are required.
- Option 1: OEM Provided: OEM anti-condensate and lighting controls (on/off) are standard unless otherwise specified.
- Option 2: End User Provided: Light controls should be based on occupancy sensors. Store level A/S control should be set to 30% minimum off time at 75°F/55%RH.



SHIPPING WEIGHT	
Case	Weight
ONRZQA	---



COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

**ONRZQA**

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5

**Hillphoenix**  
A DOVER COMPANY

# ONRZQA

## 1, 2, 3, 4, 5 & 6 Door Narrow Reach-In Glass Door Merchandiser Frozen Food/Ice Cream



### ELECTRICAL DATA

Case Length	Fans Per Case	High Efficiency Fans		Drain Heaters		Defrost Heaters (1-Phase)				Defrost Heaters (3-Phase)			
		120 Volts		120 Volts		208 Volts		240 Volts		208 Volts		240 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
1 Door	1	0.30	25	0.09	113	3.27	680	3.78	906	2.85	680	3.31	906
2 Door	2	0.60	50	1.32	152	7.50	1552	8.60	2068	6.50	1552	7.50	2068
3 Door	3	1.00	75	1.50	171	10.90	2274	12.60	3018	9.50	2274	10.90	3018
4 Door	4	1.30	100	1.90	226	14.30	2984	16.60	3992	12.40	2984	14.40	3992
5 Door	5	1.60	125	2.30	275	17.50	3640	20.20	4840	15.10	3640	17.40	4840
6 Door	6	1.90	150	2.70	320	20.30	4224	23.40	5624	17.60	4224	20.30	5624

### LIGHTING DATA

Case Length	Door Size	OP45		OP7 Single Swing	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
1 Door	31"	0.18	21.0	0.14	16.8
2 Door	30"	0.36	43.1	0.28	33.0
3 Door	30"	0.54	65.2	0.41	49.2
4 Door	30"	0.73	87.3	0.55	65.4
5 Door	30"	0.91	109.4	0.68	81.6
6 Door	30"	1.10	131.5	0.82	97.8

### ANTI CONDENSATE DATA

Case Length	Door Size	Individual Circuits									
		I90 Doors				ELMD,ELMH Doors				Door Frame	
		Heated Doors		Low E Doors		Heated Doors		Low E Doors		101-LE	
		120 Volts		120 Volts		120 Volts		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
1 Door	31"	0.26	32	0.16	19	0.30	36	0.18	21	0.72	86
2 Door	30"	0.53	63	0.32	38	0.59	71	0.35	42	1.19	143
3 Door	30"	0.79	95	0.48	57	0.89	107	0.53	63	1.67	200
4 Door	30"	1.05	126	0.63	76	1.18	142	0.70	84	2.18	262
5 Door	30"	1.32	158	0.79	95	1.48	178	0.88	105	2.64	317
6 Door	30"	1.58	190	0.95	114	1.78	213	1.05	126	3.13	376



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### ONRZQA

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5



A DOVER COMPANY

# ONRZQA

1, 2, 3, 4, 5 & 6 Door Narrow Reach-In Glass Door Merchandiser  
Frozen Food/Ice Cream



DEFROST CONTROLS			
Defrosts Per Day	Electric Defrost		
	Fail Safe (Min)	Termination Temp (°F)	Run Off Time (Min)
1	46	50	0

**NOTES:**

- "---" indicates that this feature is not an option on this case model.
- Door / Frame A/S circuits and fans share the same circuit (same cycle). Default jumpers can be removed in field if separate circuits are desired for A/S and fans.
- Drain heater and fan motors share the same circuit (separate cycles). Electrical circuits must be properly sized to accommodate the higher current draw of the tank heater.
- Anti-condensate heat values for Low E represent a door with no heat on the glass.
- Defrost heater 3-phase load is unbalanced.
- 3-phase defrost heater data listed represents the maximum amps per phase.
- Data listed is for Optimax Radiant. For other lighting options please contact your sales representative.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- No run-off time required for electrical defrost.
- Typical electric defrost time is 20 minutes when ambient conditions are 75°F/55%RH.
- Low energy doors (no heat on the glass) do not require anti-condensate or lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Heated doors (heat on the glass) require anti-condensate and lighting controls. Frame A/S heat is cycled off during defrost cycles.
- Light and A/S wattages above reflect 100% run time. To determine actual daily energy usage at 75°F/55%RH conditions, reduce the light wattages above by 42% and reduce the A/S values above by the minimum off time.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

**ONRZQA**

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5



A DOVER COMPANY

# ONRZQA

## 1, 2, 3, 4, 5 & 6 Door Narrow Reach-In Glass Door Merchandiser Frozen Food/Ice Cream



SOLOCHILL DATA			@95° Condensing Temperature		
Volts	Phase	Frequency	Wire		
208	1	60	3 Wire + Ground		
Application	Case Length	Evaporator Temp (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)	
Frozen	1 Door	-7	-1	350	
Frozen	2 Door	-7	-1	350	
Frozen	3 Door	-7	-1	350	
Frozen	4 Door	-7	-1	350	
Frozen	5 Door	-7	-1	350	
Frozen	6 Door	-7	-1	350	
Ice Cream	1 Door	-15	-8	350	
Ice Cream	2 Door	-15	-8	350	
Ice Cream	3 Door	-15	-8	350	
Ice Cream	4 Door	-15	-8	350	
Ice Cream	5 Door	-15	-8	350	
Ice Cream	6 Door	-15	-8	350	

Application	Case Length	R448A					
		Condensing Unit Model	MCA	MOP	Required Capacity	THR (BTUH)	Flow Rate
Frozen	1 Door	Remote	---	---	---	---	---
Frozen	2 Door	DA130	12.4	15	1820	2727	0.8
Frozen	3 Door	DA220	19.5	20	2730	3963	1.1
Frozen	4 Door	DA220	22.1	25	3640	5239	1.5
Frozen	5 Door	DA330	28.9	30	4550	6759	1.9
Frozen	6 Door	DA420	39.9	40	5460	7923	2.3
Ice Cream	1 Door	Remote	---	---	---	---	---
Ice Cream	2 Door	DA130	12.4	15	2034	3209	0.9
Ice Cream	3 Door	DA220	19.5	20	3051	4633	1.3
Ice Cream	4 Door	DA220	22.1	25	4068	6144	1.8
Ice Cream	5 Door	DA330	28.9	30	5085	7968	2.3
Ice Cream	6 Door	DA420	39.9	40	6102	9338	2.7




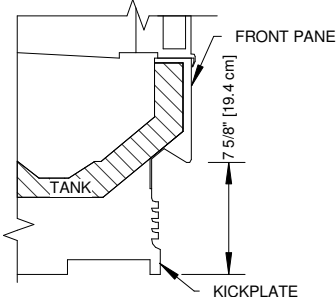
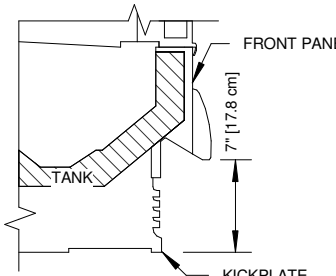
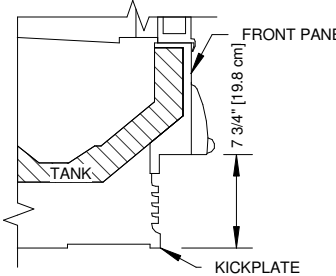
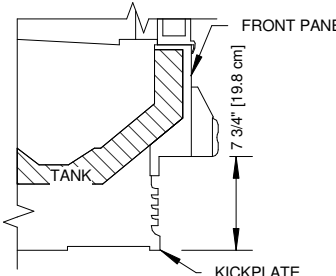
ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### ONRZQA

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5



A DOVER COMPANY


DOOR OPTIONS	FRONT OPTIONS
<p>STANDARD SWING DOOR 1, 2, 3, 4, 5, &amp; 6 - DOOR CASES</p> 	<p><b>FLAT FRONT (O SERIES)</b></p> 
	<p><b>STREAMLINE BUMPER</b></p> 
	<p><b>HALF BUMPER</b></p> 
	<p><b>CLASSIC 2 BUMPER</b></p> 



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

## ONRZQA

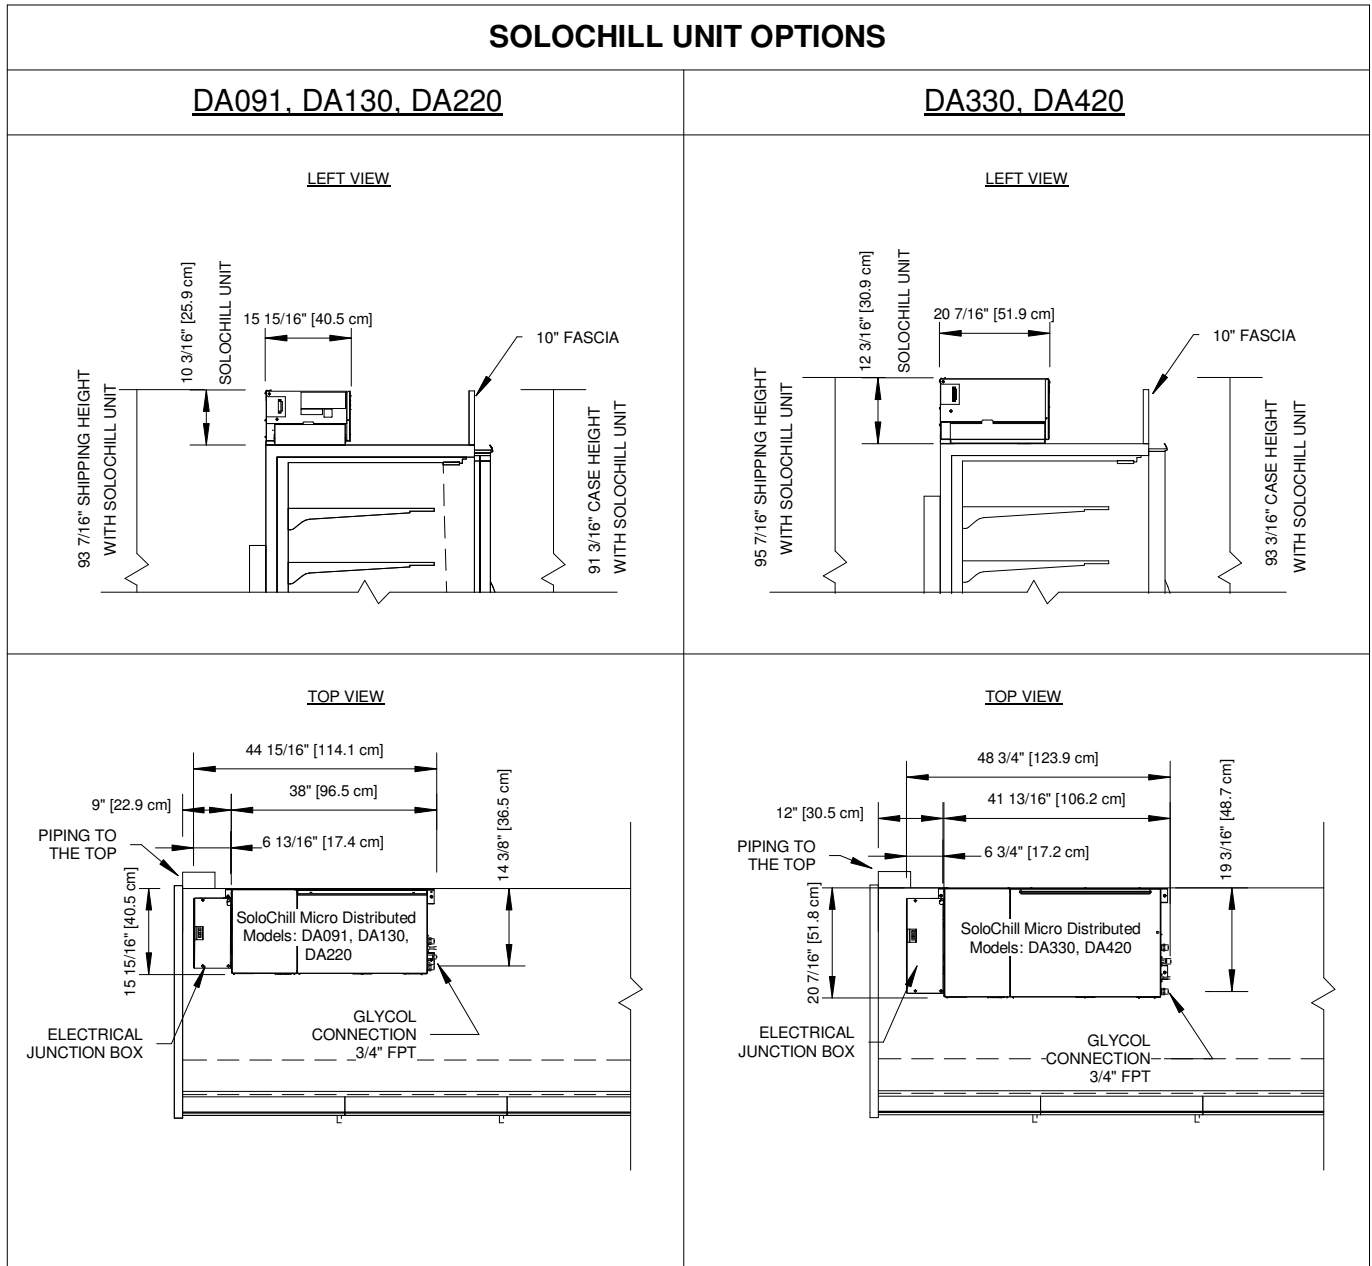Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5



**NOTES:**

•SoloChill Units are not available on the 1 Door case length. This case length is remote mount due to the length of the SoloChill Units



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

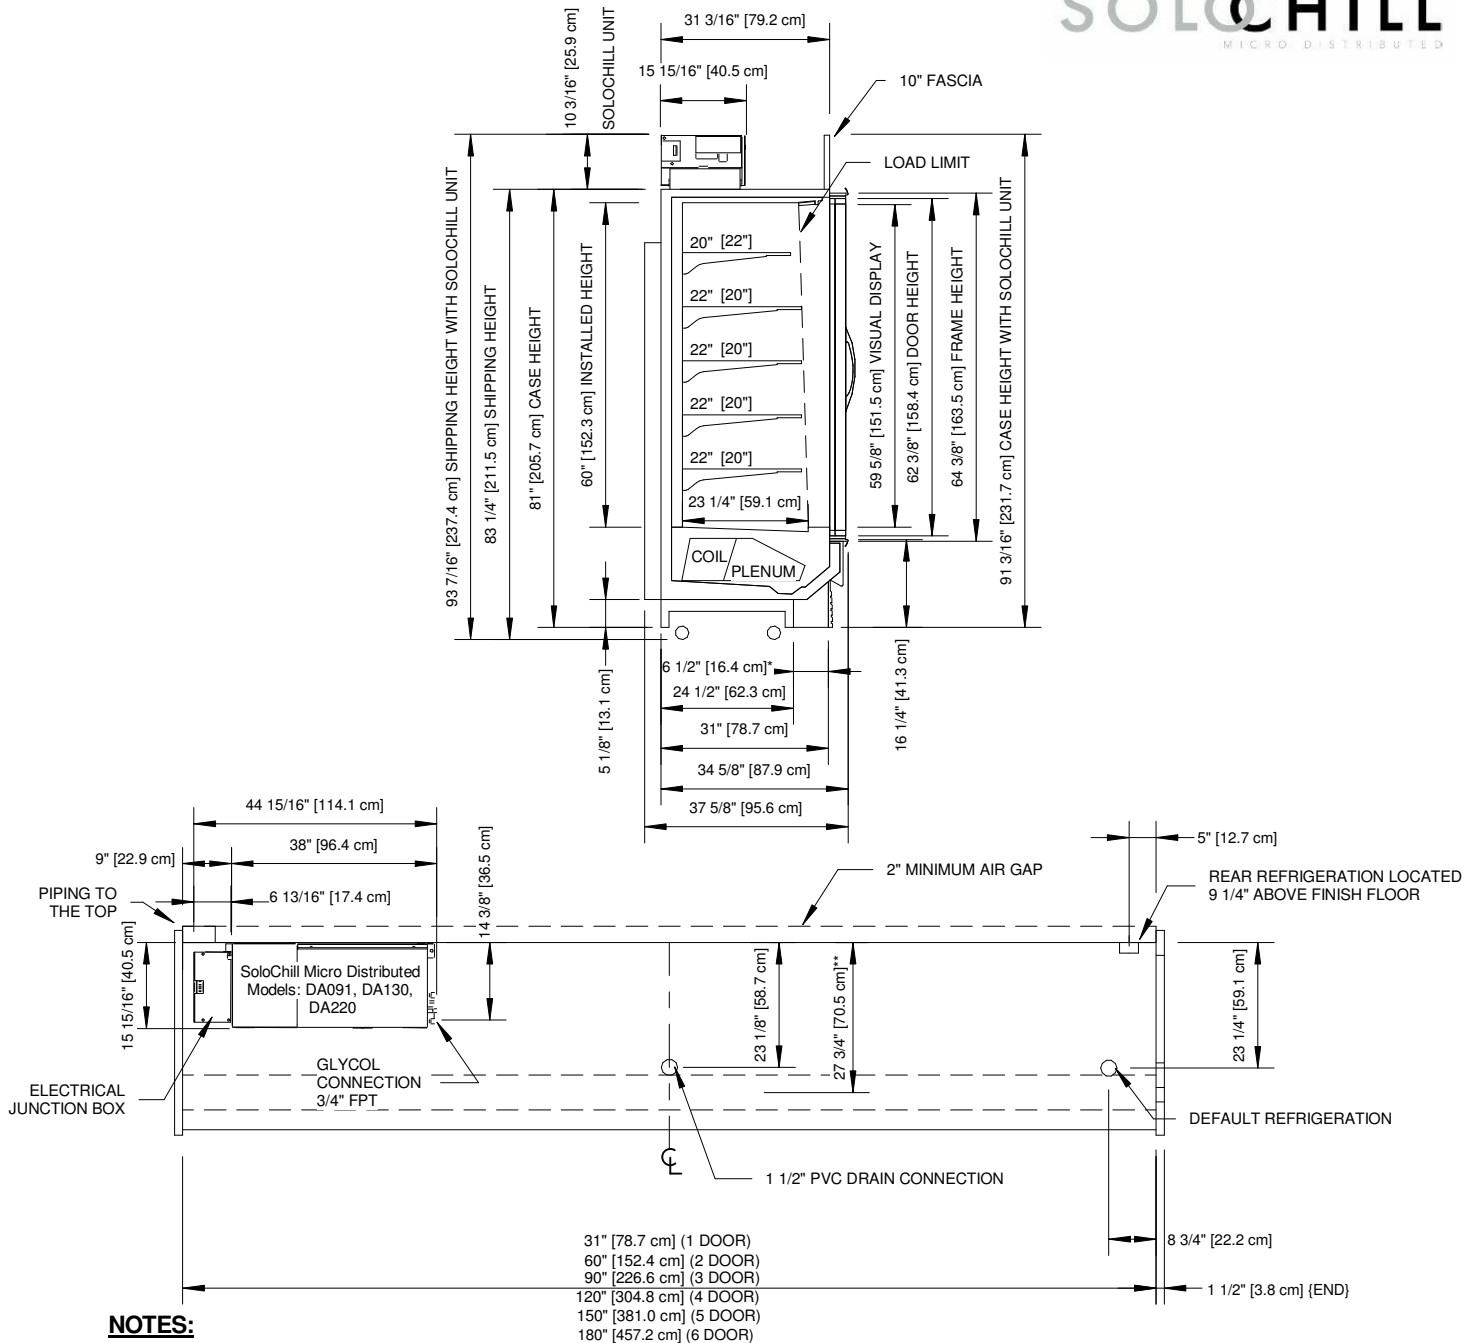
**ONRZQA**

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5

# ONRZQA

## 1, 2, 3, 4, 5 & 6 Door Narrow Reach-In Glass Door Merchandiser Frozen Food/Ice Cream

**SOLOCHILL**  
MICRO DISTRIBUTED



**NOTES:**

\* : STUB-UP AREA

\*\* : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS

•Ends add approximately 1" to case height, 1/2" to the back & 1" to the front



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### ONRZQA

Rev. Date	Rev. #	Rev. Title
4-6-21	6	DATA UPDATE
4-11-20	5	SOLOCHILL V5

**Hillphoenix**  
A DOVER COMPANY