


**GENERAL NOTES**

- "-" - "-" Indicates that the feature is not an option on this case model and/or available at this time.



SHIPPING WEIGHT	
Case	Weight
OWEZVL	---

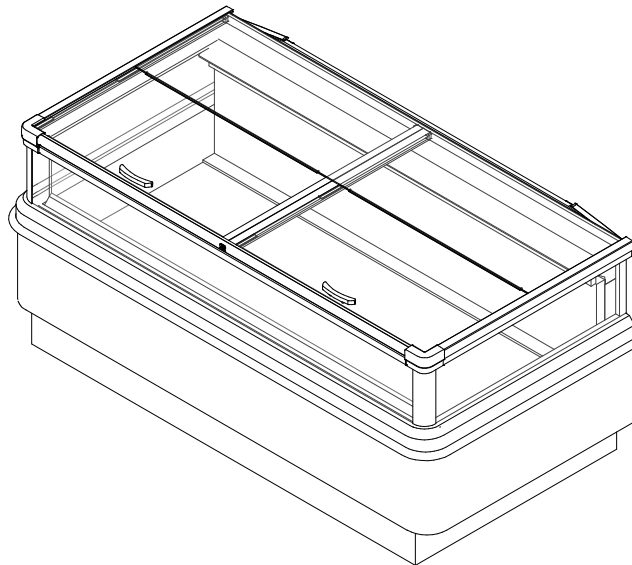

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

**OWEZVL**

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

ELECTRICAL DATA										
Fans Per Case	High Efficiency Fans		Anti Condensate Heaters				Defrost Heaters			
	120 Volt		12" Glass Front		17" Glass Front		208 Volts		240 Volts	
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
	2	0.02	1.8	0.60	72	1.05	126	8.65	1800	9.98

LIGHTING DATA			
Light Quantity	Lights Length	Clearvoyant v4 LED Lighting (Per Light Row)	
		Standard Power	
		120 Volts	
		Amps	Watts
1	5'	0.07	8.6

GUIDELINES AND CONTROL SETTINGS						
Application	BTUH/case Glass Front		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
	Conventional	Parallel				
	Dairy/Deli	647				
Fresh Meat	724	718	6 - 8	26	29	80
Frozen Food	1370	1343	3 - 5	- 11	- 8	80

DEFROST CONTROLS							
Application	Defrosts Per Day	Electric Defrost			Hot Gas Defrost		
		Fail Safe (Min)	Termination Temp (°F)	Run Off Time (Min)	Fail Safe (Min)	Termination Temp (°F)	Run Off Time (Min)
Dairy/Deli/Fresh Meat	1	45	55	10	15	65	15
Frozen Food	1	60	55	10	20	65	15

### NOTES

- "- - -" Indicates that the feature is not an option on this case model and/or available at this time.
- Listed discharge air velocity represents the average velocity after defrost.
- Temperature and defrost settings listed below are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Fans must remain on during defrost.
- Anti-condensate heat is 0W for medium temperature applications.
- Drain heaters are not available from factory
- For best performance store conditions should meet 75°F & 46% Relative Humidity or below 53°F Dew Point.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

OWEZVL

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

**Hillphoenix**  
A DOVER COMPANY


## CASE CONFIGURATION

SINGLE UNITIZED ENCAP  
CASE WITH CASE JOINT


END CAP CASE

## GLASS FRONT OPTIONS


12" STREAMLYNE




12" FLAT



17" STREAMLYNE



17" FLAT




ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

OWEZVL

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

**Hillphoenix**  
A DOVER COMPANY

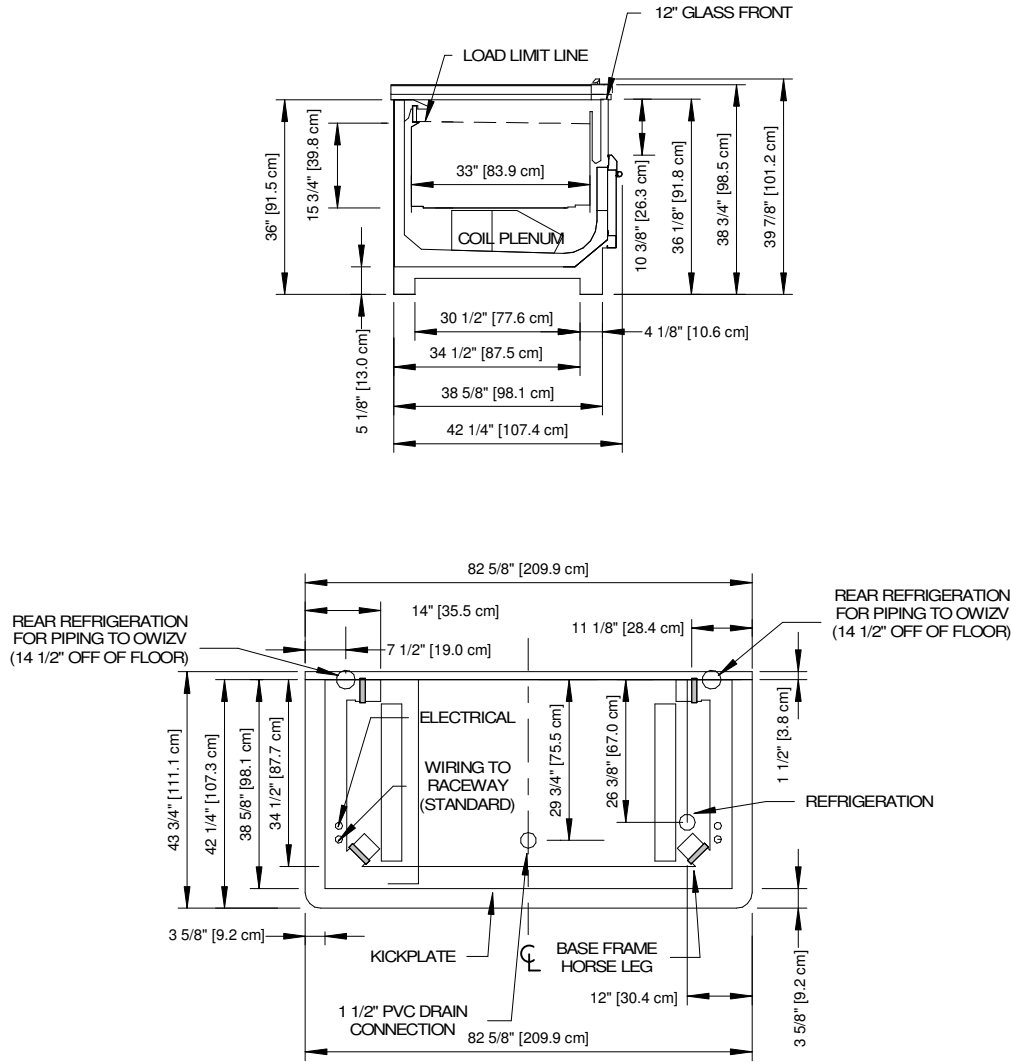

### NOTES

- \* : STUB-UP AREA
- \*\* : RECOMMENDED SETUP-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS

- Standalone case is not available; must require unitization to OWIZVL



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

### OWEZVL

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS