


GENERAL NOTES

- "-" indicates that the feature is not an option on this case model and/or is not available at this time.



SHIPPING WEIGHT	
Case	Weight
OWIZVL	---

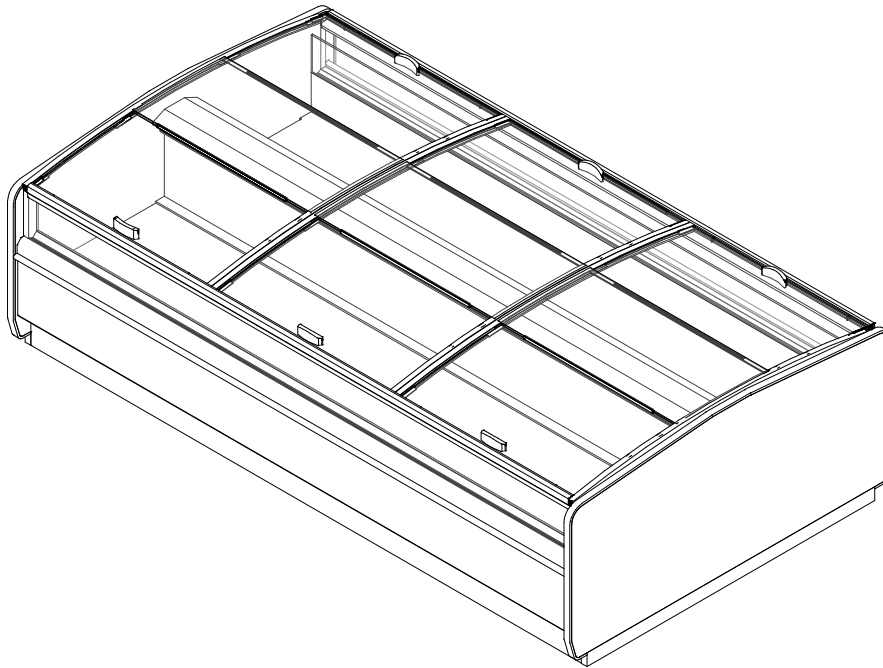

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

OWIZVL

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

ELECTRICAL DATA											
Case Length	Fans Per Case	High Efficiency Fans		Anti Condensate Heaters				Defrost Heaters			
		120 Volt		12" Glass Front		17" Glass Front		208 Volts		240 Volts	
		Amps	Watts	120 Volts		120 Volts		Amps	Watts	Amps	Watts
				Amps	Watts	Amps	Watts				
6'	4	0.02	5.3	1.38	165	1.61	193	8.70	1800	10.00	2400
8'	4	0.04	5.3	1.55	186	2.04	244	11.54	2400	13.31	3195
12'	6	0.07	7.9	2.13	255	3.01	361	17.31	3600	19.98	4795

LIGHTING DATA				
Case Length	Light Quantity	Lights Length	Clearvoyant v4 LED Lighting (Per Light Row)	
			Standard Power	
			120 Volts	
			Amps	Watts
6'	4	2 - 2', 2 - 3'	0.14	16.4
8'	4	2 - 3', 2 - 4'	0.18	21.4
12'	6	2 - 3', 4 - 4'	0.28	33.2

GUIDELINES AND CONTROL SETTINGS						
Application	BTUH/ft		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
	Conventional	Parallel				
Dairy/Deli	153	151	6 - 8	26	30	80
Fresh Meat	172	169	6 - 8	22	25	80
Frozen Food	327	320	3 - 5	- 7	- 4	80

DEFROST CONTROLS							
Application	Defrosts Per Day	Electric Defrost			Hot Gas Defrost		
		Fail Safe (Min)	Termination Temp (°F)	Run Off Time (Min)	Fail Safe (Min)	Termination Temp (°F)	Run Off Time (Min)
Dairy/Deli/Fresh Meat	1	45	55	10	15	65	15
Frozen Food	1	60	55	10	20	65	15

NOTES

- "- -" indicates that the feature is not an option on this case model and/or is not available at this time.
- Defrost data represent one side of the case only. These values must be doubled to account for both sides.
- Lighting data represent both sides of the case.
- Listed discharge air velocity represents the average velocity after defrost.
- Temperature and defrost settings listed below are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Fans must remain on during defrost.
- Anti-condensate heat is 0W for medium temperature applications.
- Drain heaters are not available from factory.
- For best performance store conditions should meet 75°F & 46% Relative Humidity or below 53°F Dew Point.




ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

OWIZVL

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

Hillphoenix
A DOVER COMPANY

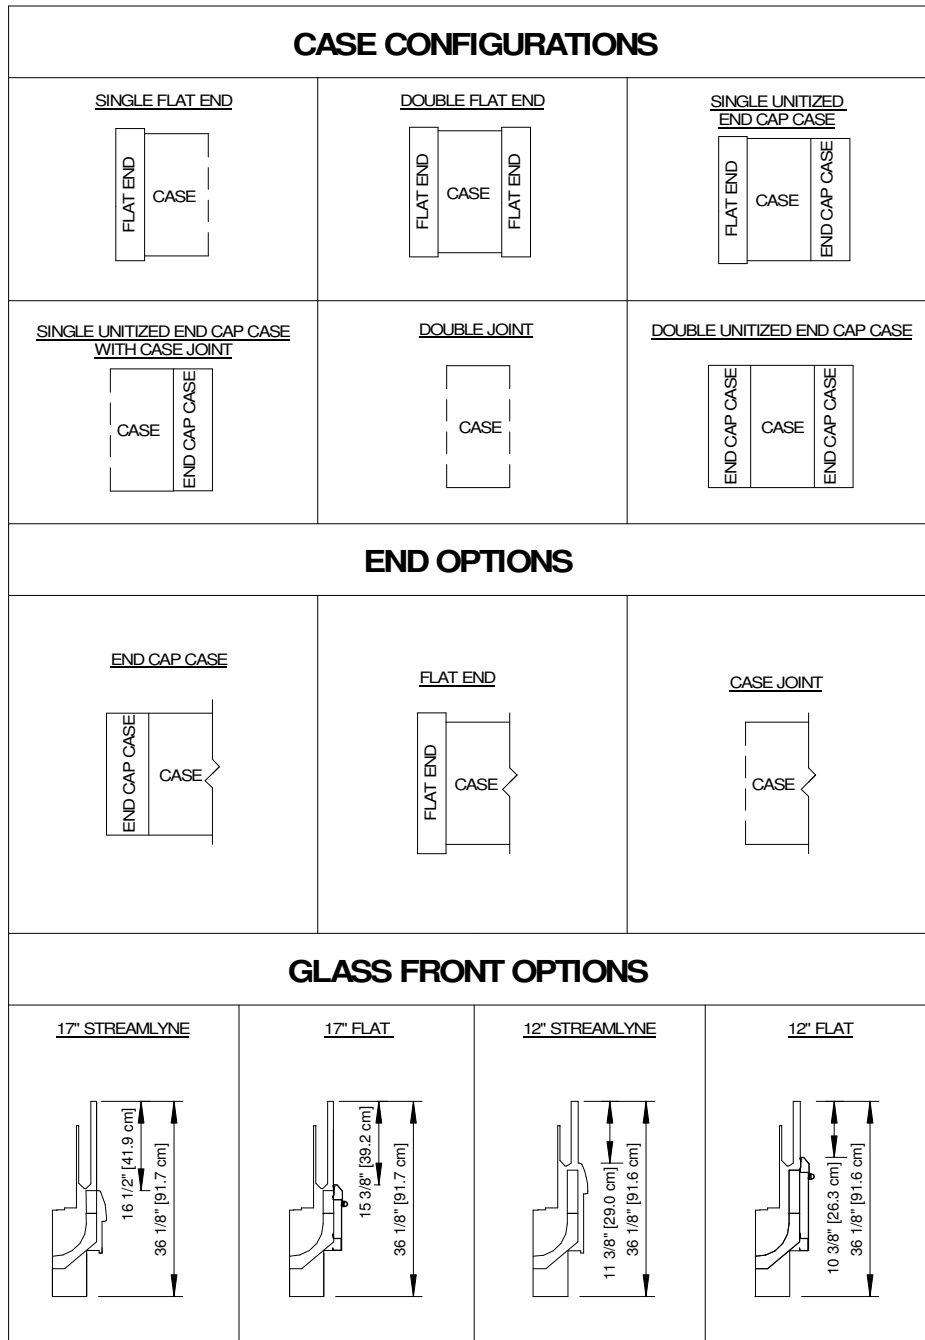

NOTES

- Options not available with slider lids:
 - Top Piping/ Wiring
 - Superstructures
 - Night Curtains




OWIZVL

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

Hillphoenix
A DOVER COMPANY

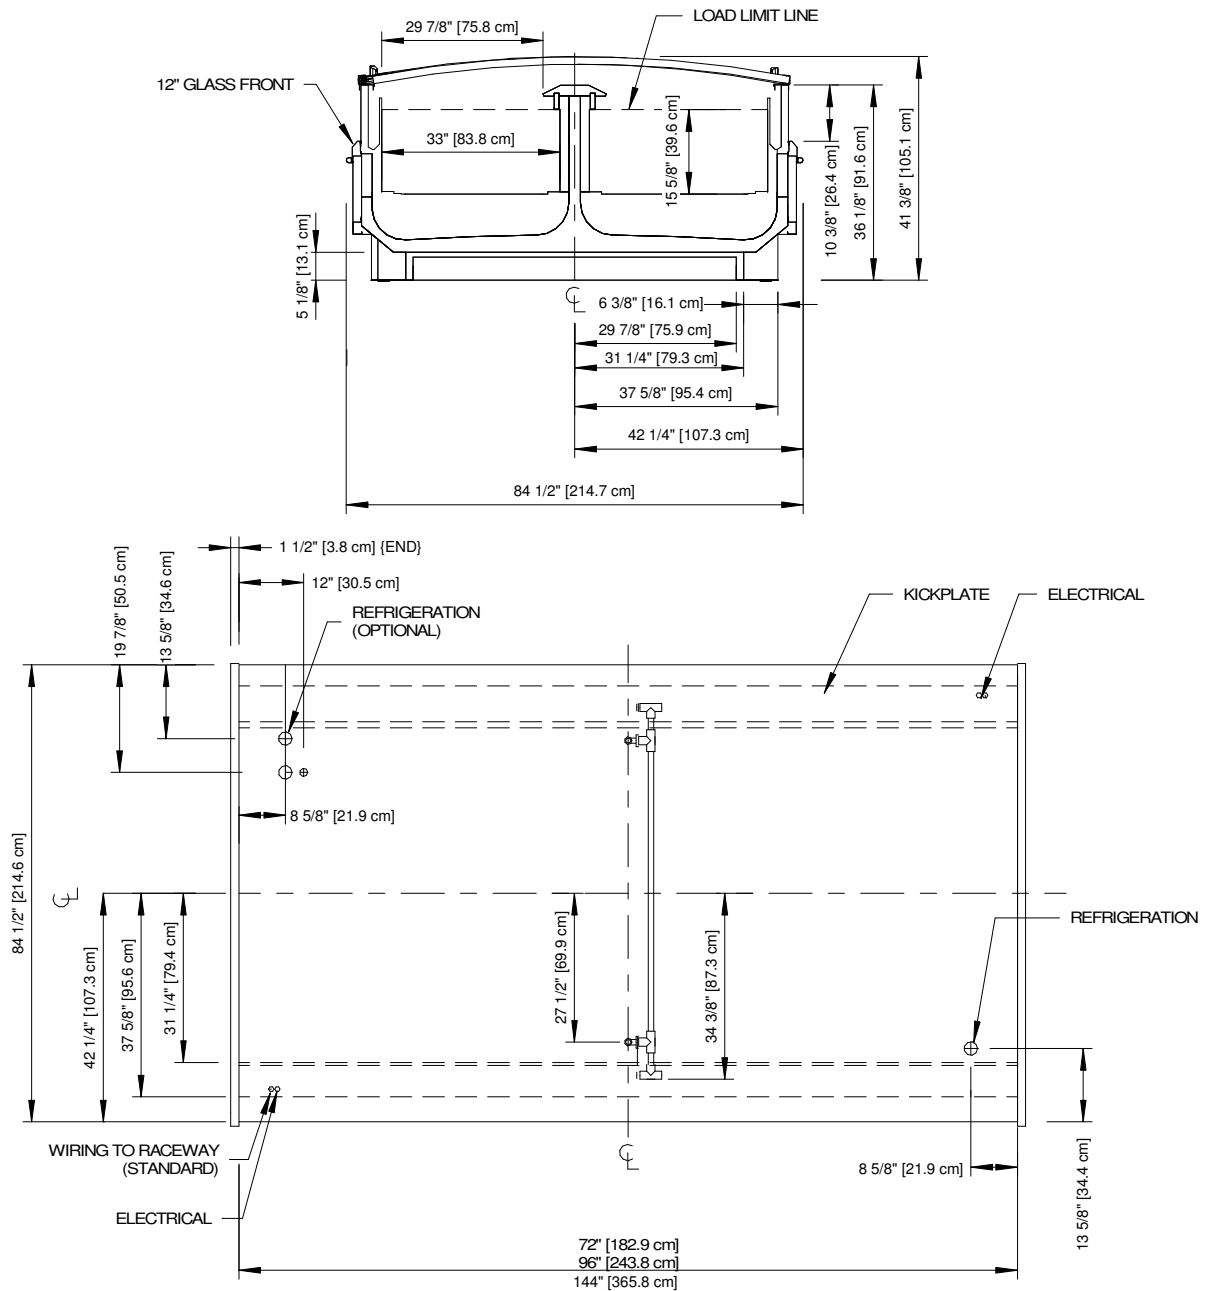

NOTES

- * : STUB-UP AREA
- ** : RECOMMENDED STUP-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS

- Ends add approximately 1" to case height and 1" to the front of the case (both sides).



OWIZVL

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

Rev. Date	Rev. #	Rev. Title
02-14-22	1	DATA UPDATE
01-11-22	0	NEW STANDARDS

Hillphoenix
A DOVER COMPANY