


**GENERAL NOTES:**

- "---" Indicates that the feature is not an option on this case model and/or the data is not yet available at this time.
- Curved glass (optional)



SHIPPING WEIGHT	
Case	Weight
SD-H-R	---

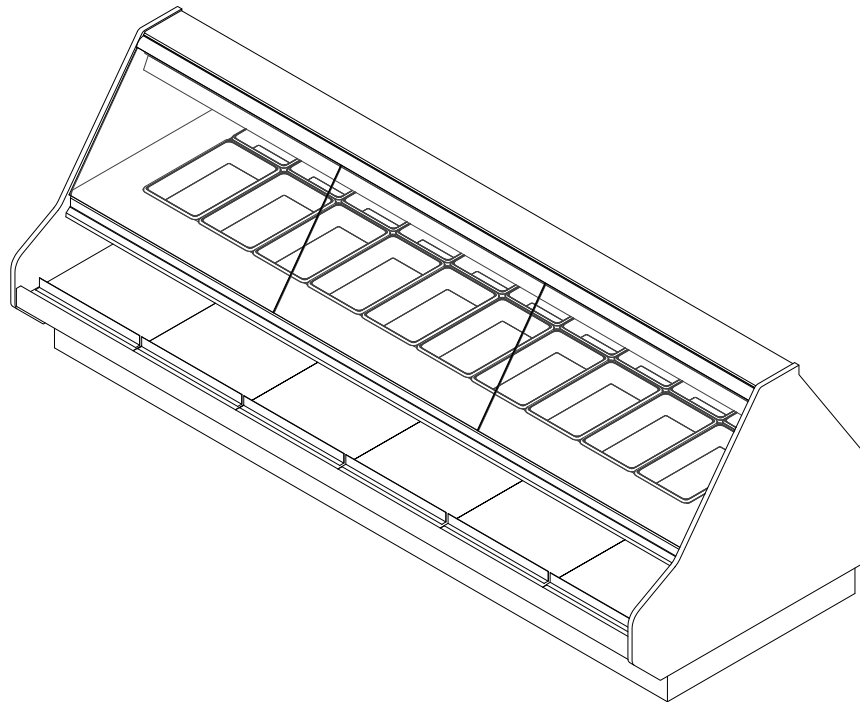

ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

**SD-H-R**

Rev. Date	Rev. #	Rev. Title
03-10-22	2	DATA UPDATE
05-14-21	1	NEW STANDARDS



ELECTRICAL DATA (BASE)									
Case Length	Fans Per Case	High Efficiency Fans		Anti-Condensate Fans		Drain Heaters		Defrost Heaters	
		120 Volts		120 Volts		120 Volts		208 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
4'	1	0.30	36	0.17	20.4	---	---	---	---
6'	1	0.30	36	0.31	37.2	---	---	---	---
8'	2	0.60	72	0.34	40.8	---	---	---	---
10'	2	0.60	72	0.52	62.4	---	---	---	---
12'	3	0.90	108	0.56	67.2	---	---	---	---

LIGHTING DATA (BASE)						
Case Length	Lights Per Row	Light Length	Clearvoyant 4 LED Lighting (Per Light Row)			
			Standard Power (Cornice or Shelf)		High Power (Cornice)	
			120 Volts		120 Volts	
			Amps	Watts	Amps	Watts
4'	1	4'	0.05	5.9	0.12	14.9
6'	2	3'	0.08	9.4	0.20	23.8
8'	2	4'	0.10	11.8	0.24	29.8
10'	2	5'	0.12	15.0	0.30	37.0
12'	3	4'	0.15	17.7	0.36	44.7

GUIDELINES AND CONTROL SETTINGS (DX) (BASE) {DIRECT EXPANSION HFC/CO2}					
BTUH/ft		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
Conventional	Parallel				
689	636	6 - 8	26	30	360

DEFROST CONTROLS {DIRECT EXPANSION HFC/CO2}							
Defrosts Per Day	Run-Off Time (Min)	Electric Defrost		Timed-Off Defrost		Hot Gas Defrost	
		Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)
4	---	---	---	45/*28	42	---	---

- NOTES:**
- "----" Indicates that the feature is not an option on this case model and/or the data is not yet available at this time.
  - Listed BTUH indicates unlighted shelves. Add the following for lighted shelves:  
 4' Shelf LED: 36 BTUH  
 4' Canopy LED: 72 BTUH  
 3' Shelf LED: 27 BTUH  
 3' Hi-Output LED: 54 BTUH
  - Listed discharge air velocity represents the average velocity at the peak of defrost.
  - Discharge air temperature values represent readings taken within the upper air channel immediately behind/upstream of the honeycomb.
  - \* Time-off duration for defrost with no termination control.



ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

## SD-H-R

Rev. Date	Rev. #	Rev. Title
03-10-22	2	DATA UPDATE
05-14-21	1	NEW STANDARDS



SERVICE DATA (DOME)												
Case Length	Top Heaters		Bottom Heaters		Lights		Shelves		Total Amps (120/208-1-60)	Total Amps (120/208-3-60)		
	Qty	Watts (Each)	Qty	Watts (Each)	Qty	Watts (Each)	Qty	Watts (Each)		L1	L2	L3
4'	3	250	2	400	2	100	---	---	---	---	---	---
6'	4	250	3	400	3	100	---	---	---	---	---	---
8'	6	250	4	400	4	100	---	---	---	---	---	---
10'	7	250	5	400	5	100	---	---	---	---	---	---
12'	8	250	6	400	6	100	---	---	---	---	---	---

ELECTRICAL DATA (DOME)			
Case Length	Fans Per Case	Convection Fans	
		120 Volts	
		Amps	Watts
4'	1	0.06	7.2
6'	2	0.12	14.4
8'	2	0.12	14.4
10'	3	0.18	21.6
12'	3	0.18	21.6

LIGHTING DATA (DOME)				
Case Length	Lights Per Row	Light Length	Incandescent Lighting (Per Light Row)	
			Amps	Watts
4'	---	---	1.66	200
6'	---	---	2.50	300
8'	---	---	3.30	400
10'	---	---	4.60	500
12'	---	---	5.00	600




ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

## SD-H-R

Rev. Date	Rev. #	Rev. Title
03-10-22	2	DATA UPDATE
05-14-21	1	NEW STANDARDS





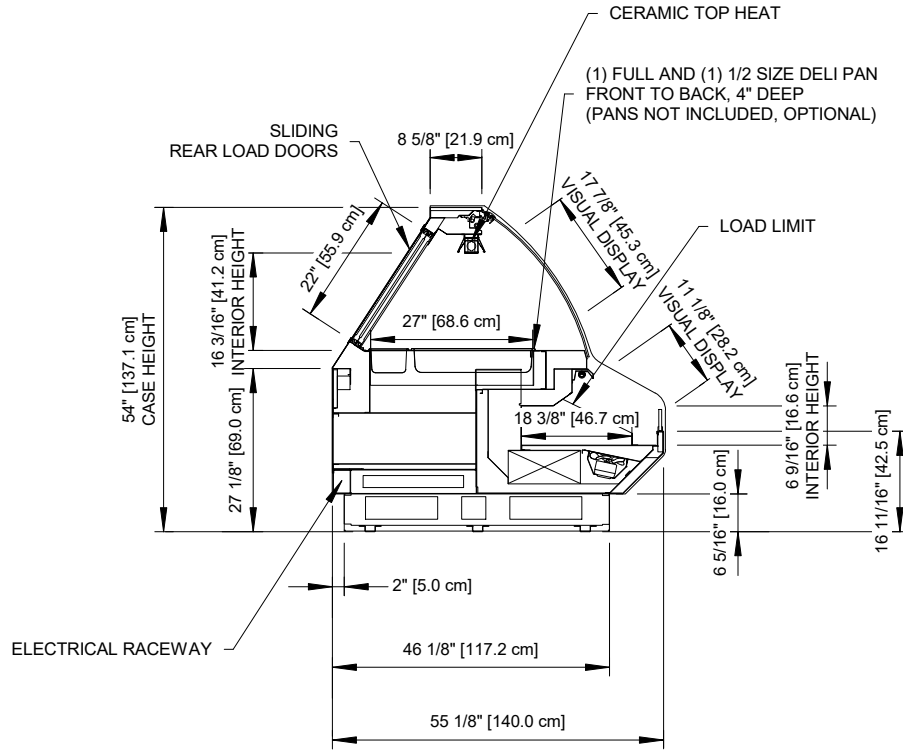

## CURVED GLASS (OPTIONAL)



ENGINEERED FOR STORES WITH AMBIENT CONDITIONS NOT TO EXCEED 75° AND 55% RELATIVE HUMIDITY. DUE TO ENGINEERING IMPROVEMENTS SPECIFICATIONS MAY CHANGE WITHOUT NOTICE. ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS. NUMBERS ARE BASED ON STANDARD CASE SIZES. CONSULT ENGINEERING.

## SD-H-R

Rev. Date	Rev. #	Rev. Title
03-10-22	2	DATA UPDATE
05-14-21	1	NEW STANDARDS

