


VRB

2, 3, 4, & 5 Door / 4', 6', 8', & 12' Reach-In Merchandiser
 Beverage / Dairy / Bakery / Cut Produce / Deli / Meat / Seafood / Produce

GENERAL NOTES:

- 4-foot case Bi-Swing consist of 2 (24") doors.
- 6-foot case Bi-Swing consist of 3 (24") doors.
- 8-foot case Bi-swing consist of 4 (24") doors.
- 12-foot cases Bi-swing consist of 6 (24") doors.
- Door frames are heated. Doors are not heated.
- Lighting controls - occupancy sensors are required.
- Option 1: OEM Provided: Lighting controls (on/off) are standard unless otherwise specified.
- Option 2: End User Provided: Lighting controls should be based on occupancy sensors. Store level A/S control should be set to 20% minimum off time at 75°F/55%RH.

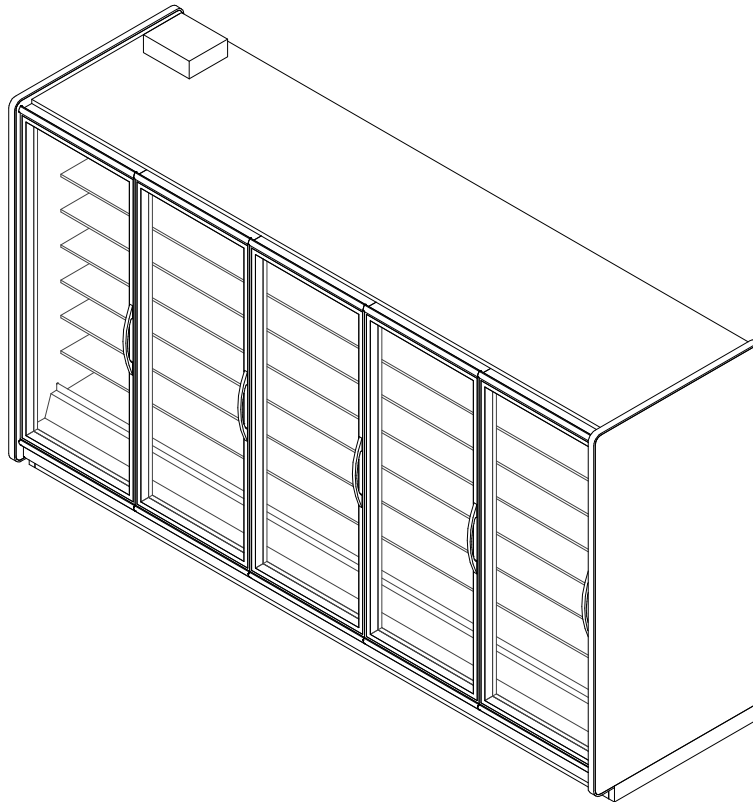

SHIPPING WEIGHT	
Case	Weight
VRB	---



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE



VRB

2, 3, 4, & 5 Door / 4', 6', 8', & 12' Reach-In Merchandiser
Beverage / Dairy / Bakery / Cut Produce / Deli / Meat / Seafood / Produce

ELECTRICAL DATA			
Case Length	Fans Per Case	High Efficiency Fans	
		120 Volts	
		Amps	Watts
2 Door	1	0.22	26
3 Door	2	0.43	52
4 Door	2	0.43	52
5 Door	3	0.65	78
4'	1	0.22	26
6'	2	0.43	52
8'	2	0.43	52
12'	3	0.65	78

LIGHTING DATA									
Case Length	Door Size	OP45		OP55 (French Swing Only)		OP7 Single Swing		OP7 French Swing	
		120 Volts		120 Volts		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2 Door	30"	0.36	43.1	---	---	0.33	39.7	---	---
3 Door	24"	0.54	65.2	---	---	0.49	59.0	---	---
4 Door	24"	0.73	87.3	---	---	0.65	78.3	---	---
5 Door	24"	0.91	109.4	---	---	0.81	97.6	---	---
4'	24"	---	---	0.26	31.0	---	---	0.27	32.6
6'	30"	---	---	0.52	61.9	---	---	0.52	62.0
8'	24"	---	---	0.52	61.9	---	---	0.52	62.0
12'	24"	---	---	0.77	92.8	---	---	0.76	91.4

ANTI CONDENSATE DATA					
Case Length	Door Size	101 Frames		Vista Frames	
		Un Heated Doors		Un Heated Doors	
		ELMD, ELMH, I90		Vista C, I60	
		120 Volts		120 Volts	
		Amps	Watts	Amps	Watts
2 Door	30"	0.22	43	0.36	43
3 Door	24"	0.43	68	0.57	68
4 Door	24"	0.43	95	0.79	95
5 Door	24"	0.65	118	0.98	118
4'	24"	0.19	23	0.19	23
6'	30"	0.40	48	0.40	48
8'	24"	0.44	53	0.44	53
12'	24"	0.70	84	0.70	84



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE



A DOVER COMPANY

GUIDELINES AND CONTROL SETTINGS

Application	Case Length	Door Size	BTUH/Door		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM)
			Conventional	Parallel				
Beverage/Produce	2 - 5 Door	30"	555	550	6 - 8	34	39	235
Beverage/Produce	4'	24"	445	440	6 - 8	34	39	235
Beverage/Produce	6'	24"	445	440	6 - 8	34	39	235
Beverage/Produce	8'	24"	445	440	6 - 8	34	39	235
Beverage/Produce	12'	24"	445	440	6 - 8	34	39	235
Deli/Dairy/Cut Produce	2 - 5 Door	30"	605	580	6 - 8	31	35	235
Deli/Dairy/Cut Produce	4'	24"	485	465	6 - 8	31	35	235
Deli/Dairy/Cut Produce	6'	24"	485	465	6 - 8	31	35	235
Deli/Dairy/Cut Produce	8'	24"	485	465	6 - 8	31	35	235
Deli/Dairy/Cut Produce	12'	24"	485	465	6 - 8	31	35	235
Meat	2 - 5 Door	30"	665	640	6 - 8	28	33	235
Meat	4'	24"	530	510	6 - 8	28	33	235
Meat	6'	24"	530	510	6 - 8	28	33	235
Meat	8'	24"	530	510	6 - 8	28	33	235
Meat	12'	24"	530	510	6 - 8	28	33	235

DEFROST CONTROLS

Defrosts Per Day	Timed-Off Defrost	
	Fail-Safe (Min)	Termination Temp (F)
2	30	38

Data Notes:

- "---" indicates that this feature is not an option on this case model.
- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.
- Light wattages above reflect 100% run time. To determine actual daily energy usage at 75°F/55%RH conditions, reduce the light wattages above by 42%.



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE

VRB

2, 3, 4, & 5 Door / 4', 6', 8', & 12' Reach-In Merchandiser
Beverage / Dairy / Bakery / Cut Produce / Deli / Meat / Seafood / Produce

SECOND NATURE DATA								
Case Model	No. of Coils	Application	Front Sill height	BTUH/Door		GPM/ft (DR)	Supply Fluid Temp (°F)	Discharge Air Temp (°F)
				Conventional	Parallel			
VRB (30" Door)	1	Beverage	Std. Reach In	640	666	0.07	20	34
VRB (30" Door)	1	Deli	Std. Reach In	710	697	0.10	20	31
VRB (30" Door)	1	Meat	Std. Reach In	810	777	0.15	20	28
VRB (30" Door)	1	Beverage	Std. Reach In	640	666	0.10	25	34
VRB (30" Door)	1	Deli	Std. Reach In	710	697	0.16	25	31
VRB (30" Door)	1	Meat	Std. Reach In	810	777	0.21	25	28
VRB (Per Foot)	1	Beverage	Std. Reach In	268	266	0.03	20	34
VRB (Per Foot)	1	Deli	Std. Reach In	284	139	0.04	20	31
VRB (Per Foot)	1	Meat	Std. Reach In	324	311	0.06	20	28
VRB (Per Foot)	1	Beverage	Std. Reach In	268	266	0.04	25	34
VRB (Per Foot)	1	Deli	Std. Reach In	284	139	0.06	25	31
VRB (Per Foot)	1	Meat	Std. Reach In	324	311	0.08	25	28

SECOND NATURE DATA									
Case Model	No. of Coils	Application	Front Sill height	Supply Fluid Temp (°F)	No. of Defrost	Timed-Off Defrost		Warm Fluid Defrost	
						Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)
VRB (30" Door)	1	Beverage	Std. Reach In	20	2	60	47	26	49
VRB (30" Door)	1	Deli	Std. Reach In	20	2	60	47	26	49
VRB (30" Door)	1	Meat	Std. Reach In	20	2	60	47	26	49
VRB (30" Door)	1	Beverage	Std. Reach In	25	2	60	42	26	49
VRB (30" Door)	1	Deli	Std. Reach In	25	2	60	42	26	49
VRB (30" Door)	1	Meat	Std. Reach In	25	2	60	42	26	49
VRB (Per Foot)	1	Beverage	Std. Reach In	20	2	60	47	26	49
VRB (Per Foot)	1	Deli	Std. Reach In	20	2	60	47	26	49
VRB (Per Foot)	1	Meat	Std. Reach In	20	2	60	47	26	49
VRB (Per Foot)	1	Beverage	Std. Reach In	25	2	45	42	26	49
VRB (Per Foot)	1	Deli	Std. Reach In	25	2	45	42	26	49
VRB (Per Foot)	1	Meat	Std. Reach In	25	2	45	42	26	49

Notes:

- All medium temperature data listed is for 35% by wt. PROPYLENE GLYCOL.
- Inhibited Propylene Glycol solution with water, such as Dowfrost or equivalent. (Dowfrost is a trademark of the Dow Chemical Company).
- Flowrates are determined by ASHRAE test conditions and may need to be adjusted based on store conditions.
- ** Flowrates are per case






ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE



A DOVER COMPANY

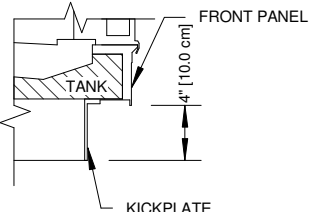
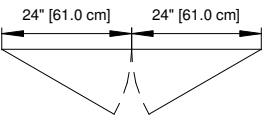
DOOR OPTIONS	FRONT OPTIONS
<p>STANDARD SWING DOOR 2, 3, 4 & 5 - DOOR CASES</p> 	<p><u>FLAT FRONT (V SERIES)</u></p> 
<p>BI-SWING DOOR 4', 6', 8' & 12' CASES</p> 	



ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE

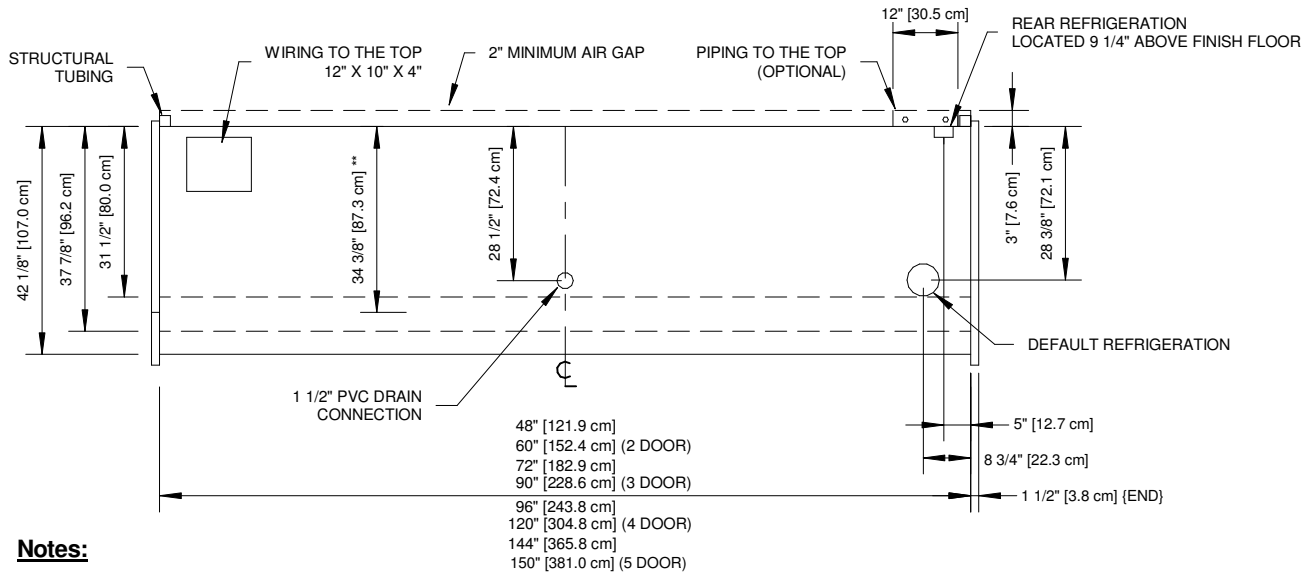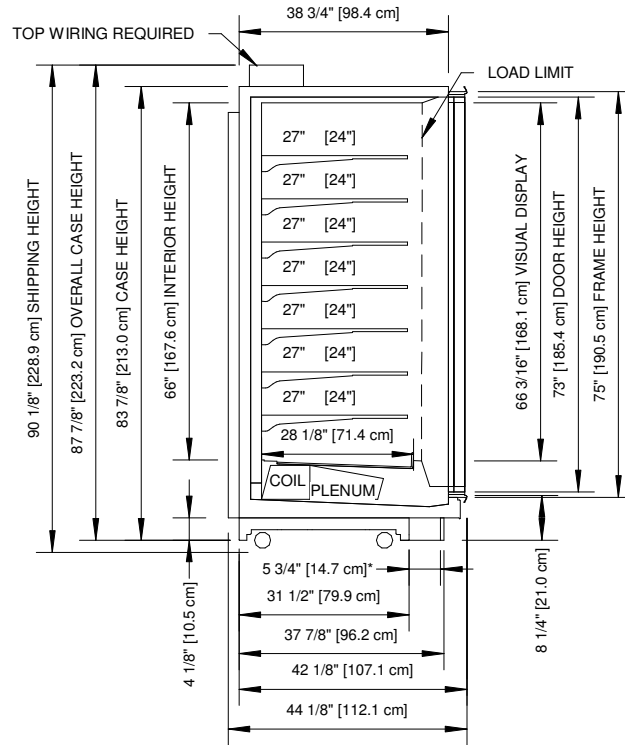

Notes:

- * : STUB-UP AREA
- ** : RECOMMENDED STUB-UP CENTERLINE FOR ELECTRICAL AND HUB DRAINS
- Ends add approximately 1" to case height, 1/2" to the back & 1" to the front.



COMPONENT

ALL MEASUREMENTS ARE TAKEN PER ASHRAE-72-2005 SPECIFICATIONS. HILLPHOENIX REFRIGERATED DISPLAY CASES FOR SALE IN THE UNITED STATES MEET OR EXCEED DEPARTMENT OF ENERGY 2017 REQUIREMENTS.

VRB

Rev. Date	Rev. #	Rev. Title
4-29-21	8	ENDVIEW UPDATE
7-13-20	7	DATA UPDATE

